

☆☆☆ 235 Series ☆☆☆

P/N: W235V**T00

Material: Nylon 6/6, UL 94V-2

Available: 2~20P

Mate with H235

Current Rating: 2.5A AC/DC



Voltage Rating: 250V AC/DC

Contact Resistance: 10mΩ Max.



Insulation Resistance: 1000mΩ Min.

Withstanding Voltage: 800V AC/minute

Temperature Range: -25°C~85°C

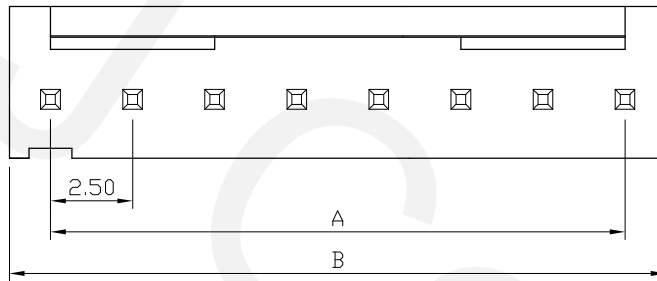

RECOMMENDED P.C. BOARD HOLE DIMM.

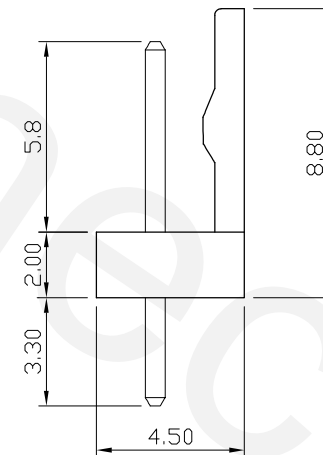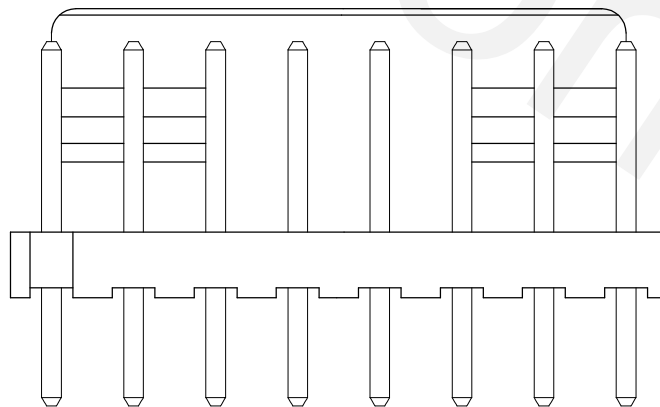

Circuitis	Dim. A	Dim. B
2	2.50	5.00
3	5.00	7.50
4	7.50	10.00
5	10.00	12.50
6	12.50	15.00
7	15.00	17.50
8	17.50	20.00
9	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.098"(2.5mm) Wire to Board Vertical Wafer

DIMENSION TOLERANCE

.x ±0.30 x° ±2°
.xx ±0.20
.xxx ±0.10

P/N	W235V**T00	CHECKED	David	UNIT	mm	DATE	2010/11/26
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A