

☆☆☆ 268 Series ☆☆☆

P/N: H268S**000

Material: Nylon 6/6, UL 94V-2, Black

Available: 2~16P

Mate with W268

Current Rating: 2.5A AC/DC




Voltage Rating: 250V AC/DC

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Operating Temperature Range: -25°C~85°C

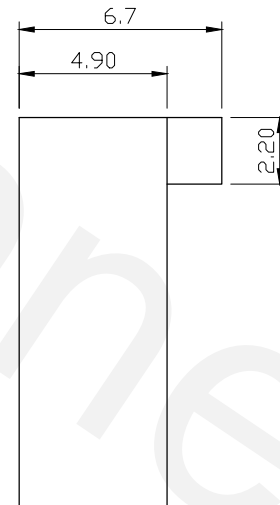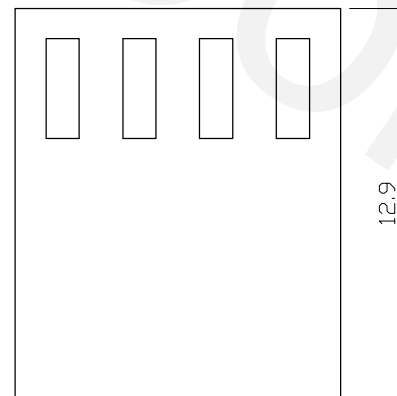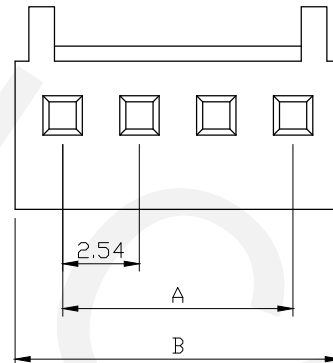

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

Circuitis	Dim. A	Dim. B
2	2.54	5.68
3	5.08	8.22
4	7.62	10.76
5	10.16	13.30
6	12.70	15.84
7	15.24	18.38
8	17.78	20.92
9	20.32	23.46
10	22.86	26.00
11	25.40	28.54
12	27.94	31.08
13	30.48	33.62
14	33.02	36.16
15	35.56	38.70
16	38.10	41.24

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.100"(2.54mm) Wire to Board Housing

DIMENSION TOLERANCE

.x ±0.30 x° ±2°
 .xx ±0.20
 .xxx ±0.10

P/N	H268S**000	CHECKED	David	UNIT	mm	DATE	2010/08/03
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A


☆☆☆ 268 Series ☆☆☆

P/N: T268B00T00


Conductor: Brass/ Tin-Plated

Thickness: 0.2mm


REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			



Section A-A



Section B-B

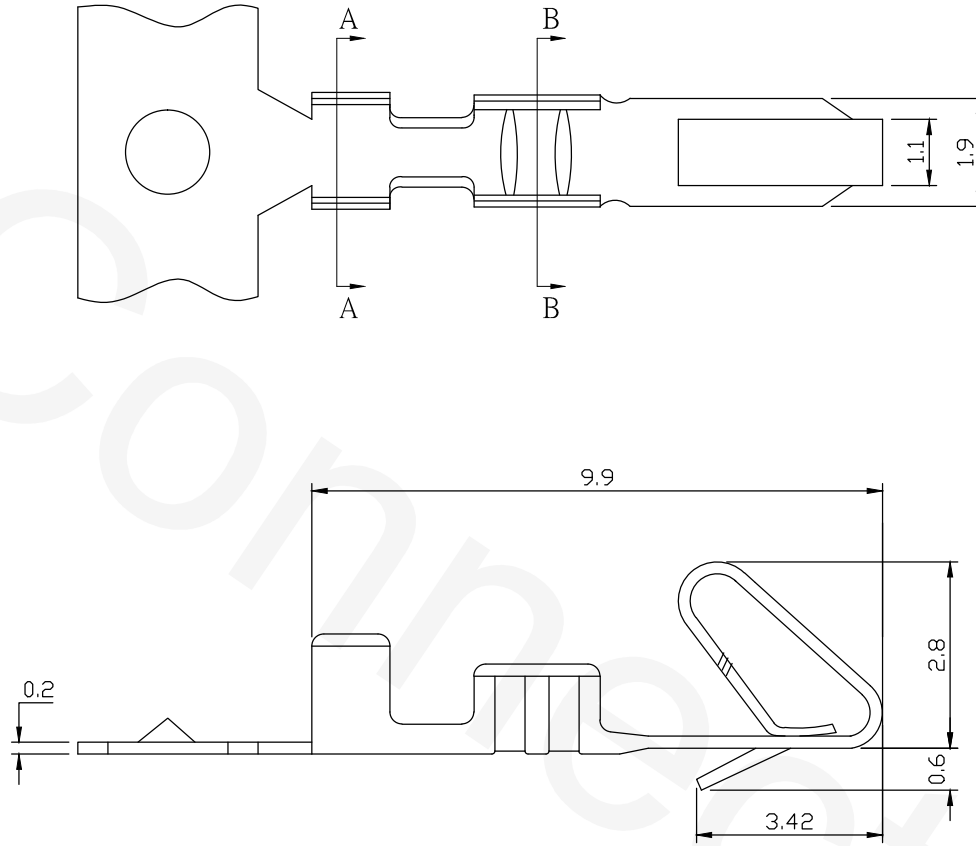

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE		.100"(2.54mm) Crimp Terminal						DIMENSION TOLERANCE	
								.x ±0.30 x° ±2°	
								.xx ±0.20	
								.xxx ±0.10	
P/N	T268B00T00	CHECKED	David	UNIT	mm	DATE	2010/08/04		
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A		

☆☆☆ 268 Series ☆☆☆

P/N: W268H**T00

Material: Nylon 6/6, UL 94V-2, Red

Conductor: Brass, Tin-Plated

Plating: Ni 30u" over Sn 80u"

Available: 2~16P

Mate with H268

Current Rating: 2.5A AC/DC



Voltage Rating: 250V AC/DC

Contact Resistance: 20mΩ Max.


Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Operating Temperature Range: -25°C~85°C

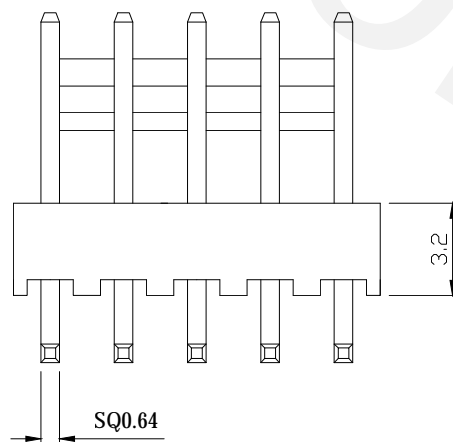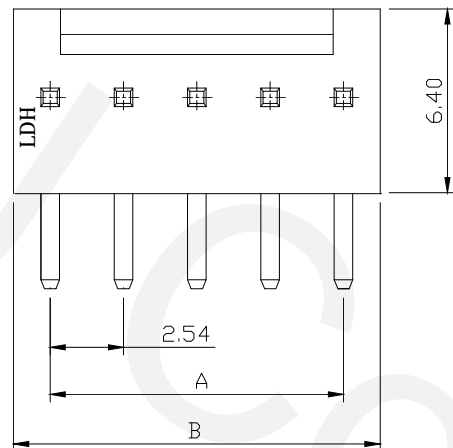

RECOMMENDED P.C.BOARD HOLE DIMM.

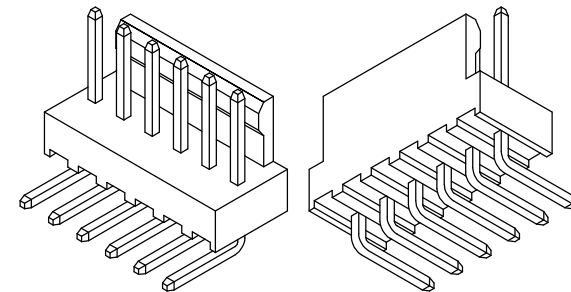

Circuitis	Dim. A	Dim. B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE
 .100"(2.54mm) Wire to Board Horizontal Wafer

DIMENSION TOLERANCE

.x ±0.30 x° ±2°
 .xx ±0.20
 .xxx ±0.10

P/N	W268H**T00	CHECKED	David	UNIT	mm	DATE	2010/08/27
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 268 Series ☆☆☆

P/N: W268H**T0W

Material: Nylon 6/6, UL 94V-2, White

Conductor: Brass, Tin-Plated

Plating: Ni 30u" over Sn 80u"

Available: 2~16P

Mate with H268

Current Rating: 4A AC/DC

Voltage Rating: 250V AC/DC

Withstanding Voltage: 1000V AC/minute

RoHS Compliant

UL 94V-2

RoHS Compliant

UL 94V-2

RoHS Compliant

UL 94V-2

RoHS Compliant

UL 94V-2

RoHS Compliant

UL 94V-2

RoHS Compliant

UL 94V-2

RoHS Compliant

UL 94V-2

RoHS Compliant

UL 94V-2

RoHS Compliant

UL 94V-2

RoHS Compliant

UL 94V-2



RoHS Compliant

UL 94V-2

RoHS Compliant



UL 94V-2

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

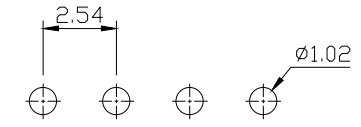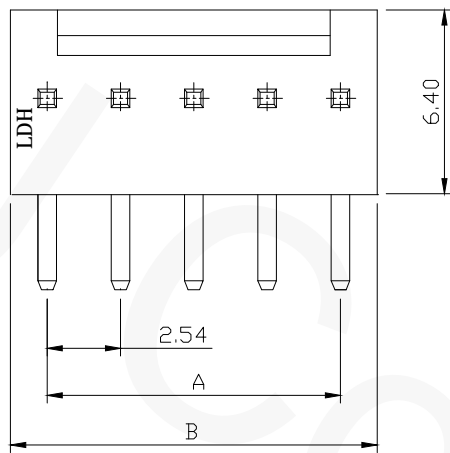

RECOMMENDED P.C.BOARD HOLE DIMM.

Circuitis	Dim. A	Dim. B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

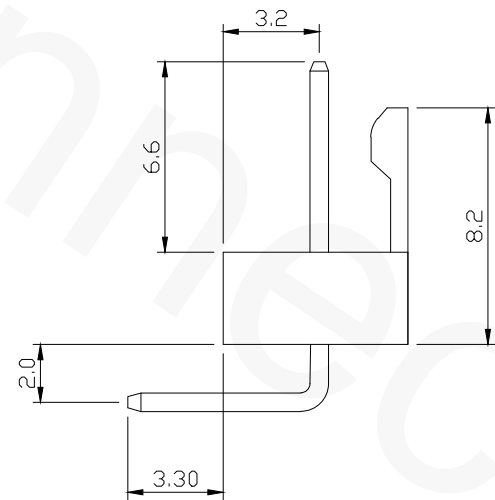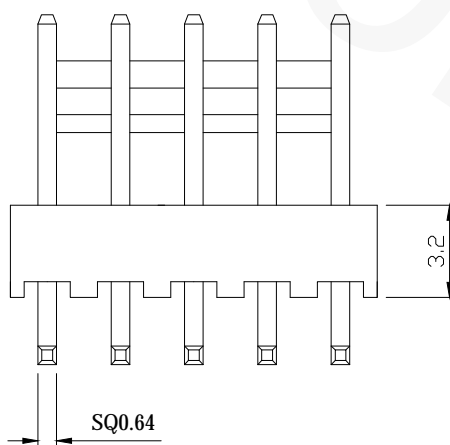

RoHS Compliant






TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE							DIMENSION TOLERANCE	
.100"(2.54mm) Wire to Board Horizontal Wafer							.x ±0.10mm .xx ±0.05mm .xxx ±0.02mm	
P/N	W268H**T0W	CHECKED	David	UNIT	mm	DATE	2013/07/11	
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A	


☆☆☆ 268 Series ☆☆☆

P/N: W268V**T00
 Material: Nylon 6/6, UL 94V-2, Red
 Conductor: Brass, Tin-Plated
 Available: 2~16P
 Mate with H268

Current Rating: 2.5A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 1000V AC/minute
 Operating Temperature Range: -25°C~85°C

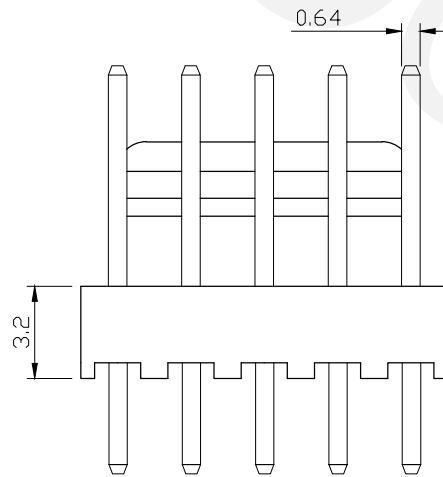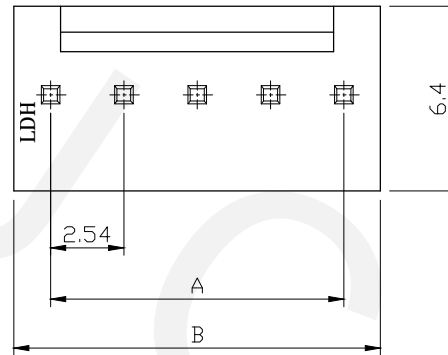

RECOMMENDED P.C.BOARD HOLE DIMM.

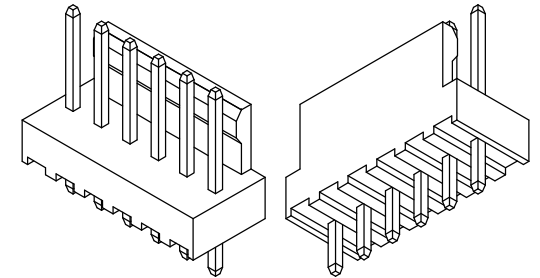

Circuitis	Dim. A	Dim. B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.100"(2.54mm) Wire to Board Vertical Wafer

DIMENSION TOLERANCE

.x ±0.30 x° ±2°
 .xx ±0.20
 .xxx ±0.10

P/N	W268V**T00	CHECKED	David	UNIT	mm	DATE	2010/08/27
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A