

☆☆☆ 127 Series ☆☆☆

P/N: H127S\*\*000

Material: Nylon 6/6, UL 94V-2, Grey

Available: 20,25,30P

Mate with T127

Current Rating: 1A AC/DC




Voltage Rating: 250V AC/DC

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Operating Temperature Range: -25°C~85°C

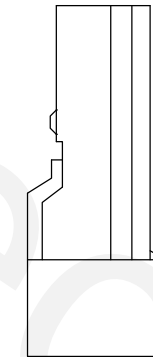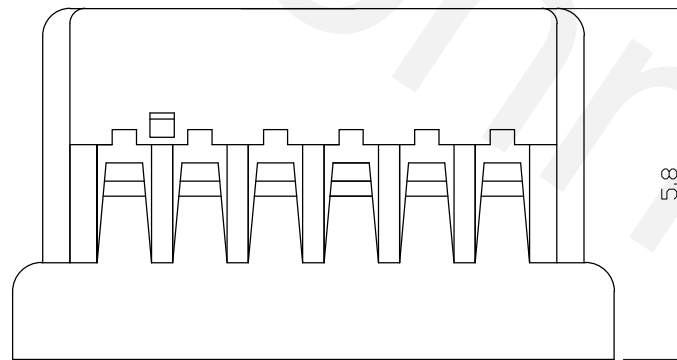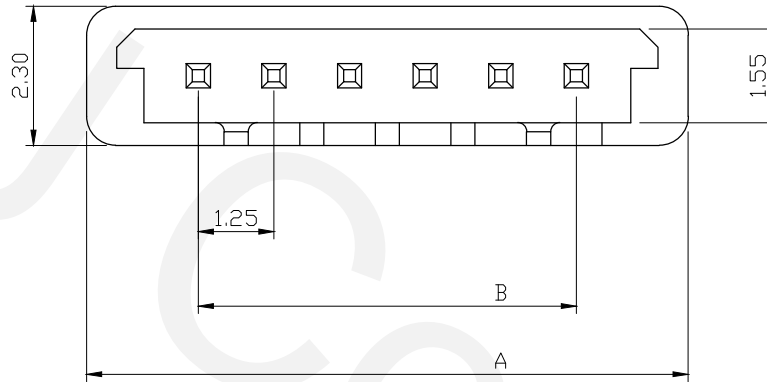

Circuitis	Dim. A	Dim. B
20	26.95	23.75
25	33.20	30.00
30	39.45	36.25
5	10.00	14.00
6	12.50	16.50
7	15.00	19.00
8	17.50	21.50
9	20.00	24.00
10	22.50	26.50
11	25.00	29.00
12	27.50	31.50
13	30.00	34.00
14	32.50	36.50
15	35.00	39.00
16	37.50	41.50

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.049"(1.25mm) Wire to Board Housing

DIMENSION TOLERANCE

.x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10


P/N	H127S**000	CHECKED	David	UNIT	mm	DATE	2010/11/26
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 127 Series ☆☆☆


P/N: T127P00T00

Conductor: Phosphor Bronze, Tin-plated 60u"


Mate with H127



Section A-A



Section B-B

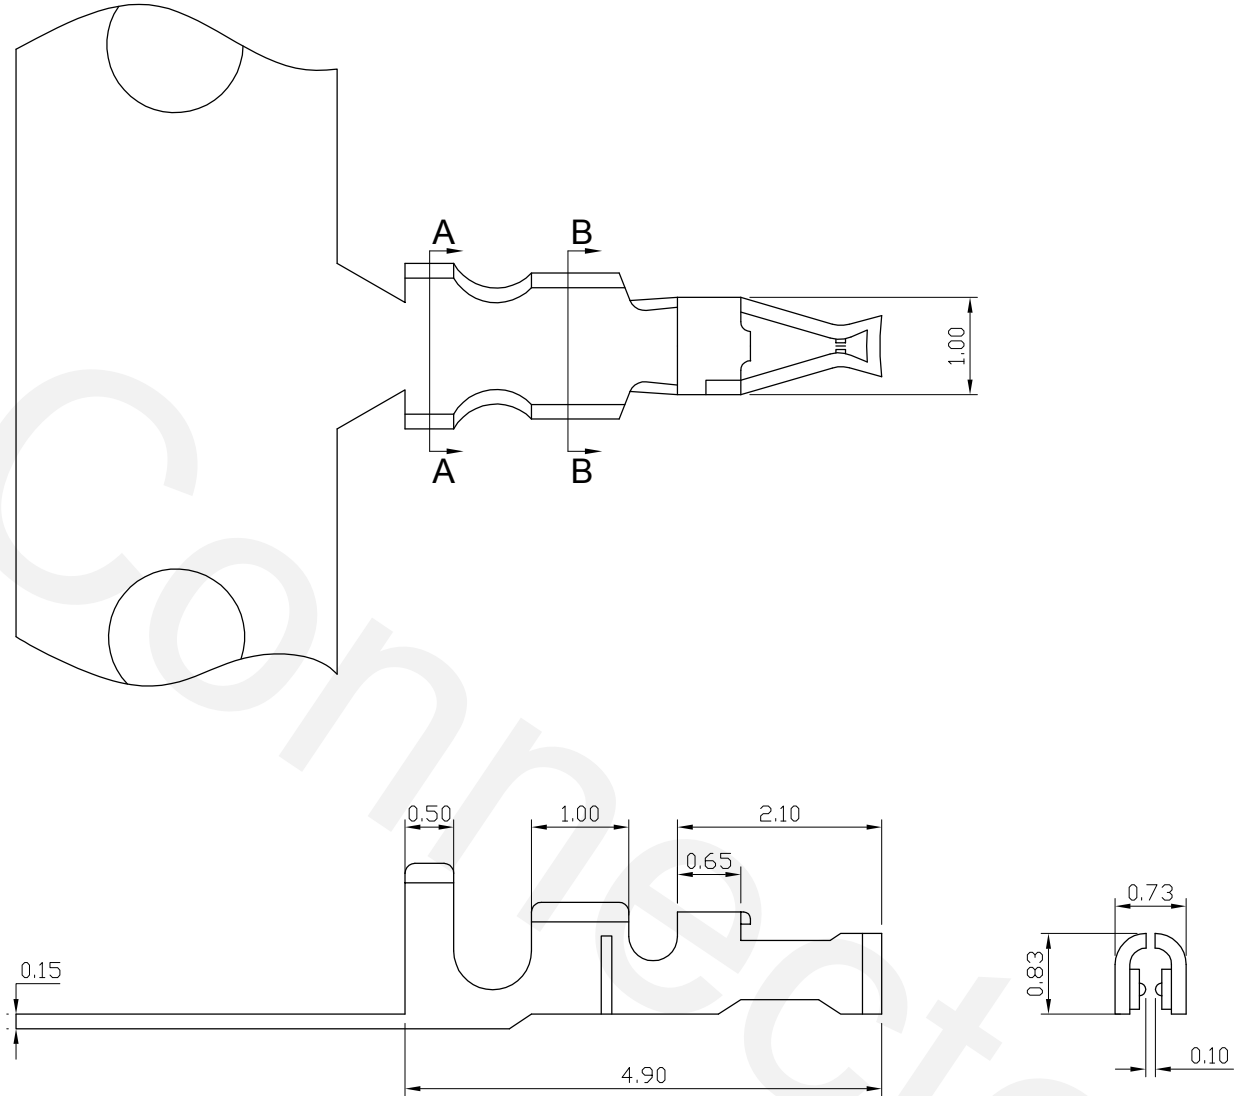

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.049"(1.25mm) Wire to Board Terminal

DIMENSION TOLERANCE

.x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

P/N	T127P00T00	CHECKED	David	UNIT	mm	DATE	2010/11/26
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 127 Series ☆☆☆

P/N: W127H\*\*T0S

Material: Nylon 6T, UL 94V-0, Natural

Conductor: Phosphor Bronze, Tin-Plated

Available: 2~30P

Mate with H127

\* 2~15 with column

\* 20,25,30 with/without column

Current Rating: 1A AC/DC

Voltage Rating: 100V AC/DC




Operating Temperature: -25°C~85°C

Insulation Resistance: 500MΩ/Min.



Withstand Voltage: 500V AC/Min.

Contact Resistance: 20mΩ/Max.

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

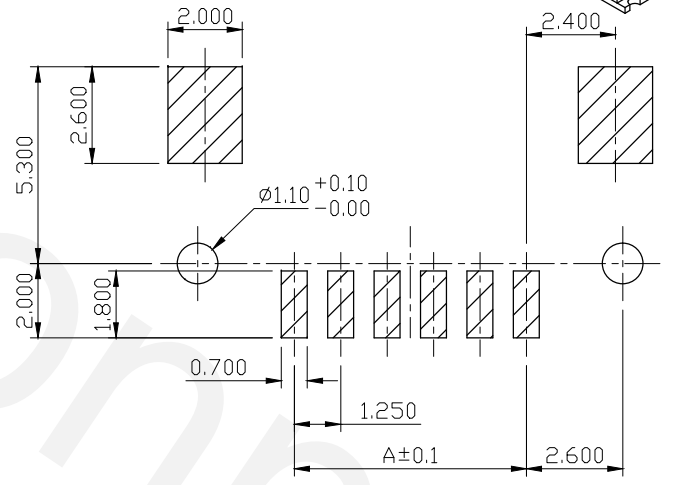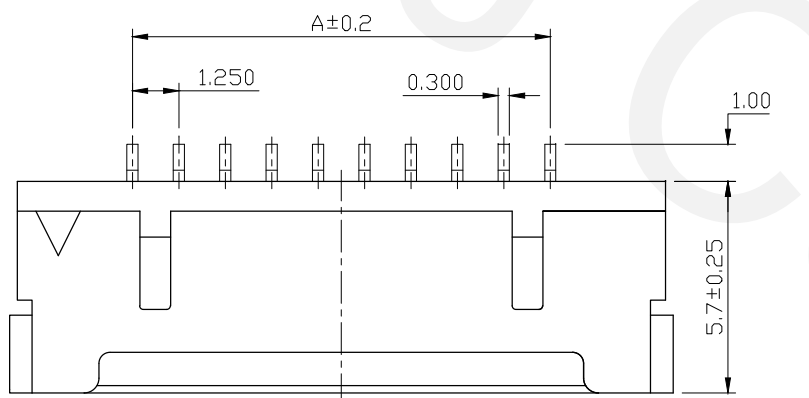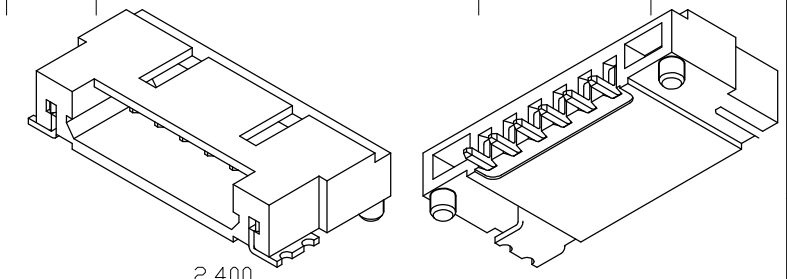

RECOMMENDED P.C. BOARD HOLE DIMM.

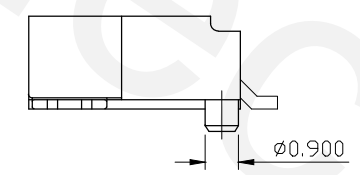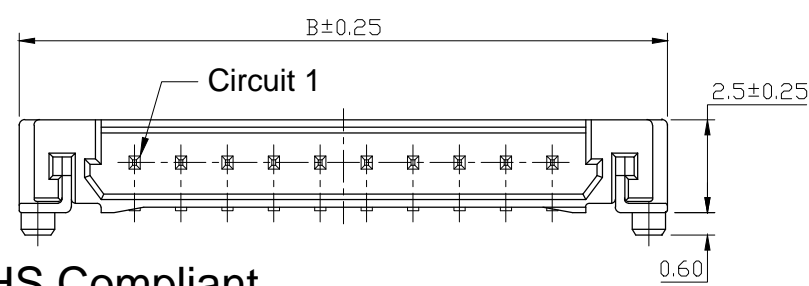

Circuitis	Dim. A	Dim. B
2	1.25	7.45
3	2.50	8.70
4	3.75	9.95
5	5.00	11.20
6	6.25	12.45
7	7.50	13.70
8	8.75	14.95
9	10.00	16.20
10	11.25	17.45
15	17.50	23.70
20	23.75	29.95
25	30.00	36.20
30	36.25	42.45

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
 .049"(1.25mm) Wire to Board Horizontal Wafer with Column

DIMENSION TOLERANCE	
.x	±0.30 x° ±2°
.xx	±0.20
.xxx	±0.10

P/N	W127H**T0S	CHECKED	David	UNIT	mm	DATE	2010/09/17
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 127 Series ☆☆☆

P/N: W127V\*\*G0S

Material: LCP, UL 94V-0

Conductor: Phosphor Bronze, Gold-Flash


Available: 4~100P

Current Rating: 1A


Insulation Resistance: 1000MΩ Min.

Contact Resistance: 20mΩ Max.



Operating Temperature: -40°C~105°C

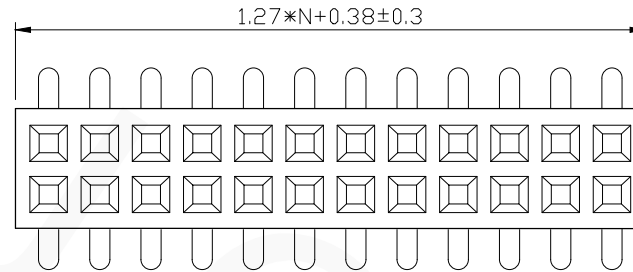

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

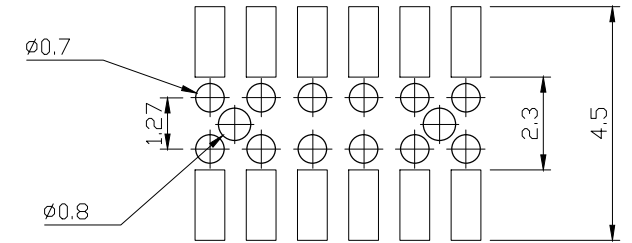

RECOMMENDED P.C.BOARD HOLE DIMM.

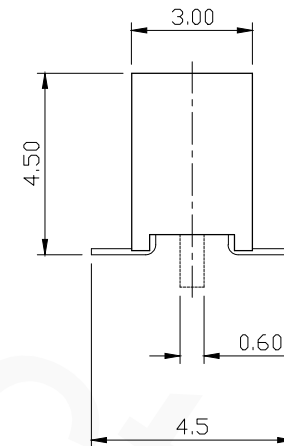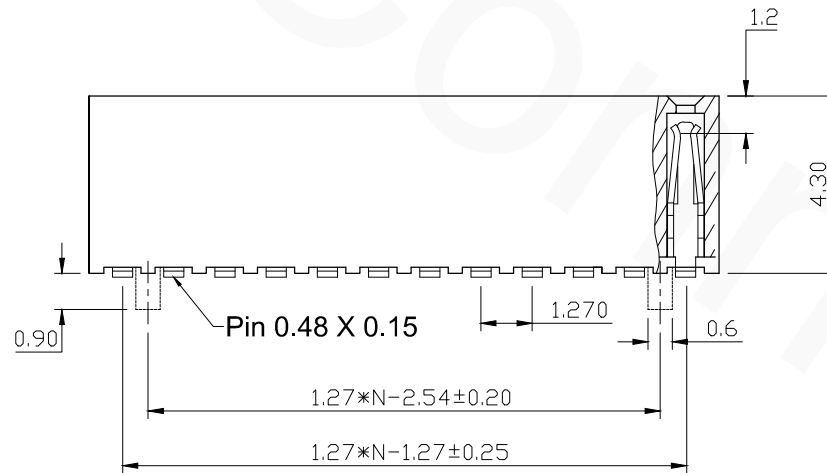

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.050"(1.27mm) Dual Row SMT Female Wafer

DIMENSION TOLERANCE

.x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

P/N	W127V**G0S	CHECKED	David	UNIT	mm	DATE	2011/05/25
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

F名稱 (TITLE):