

☆☆☆ 243 Series ☆☆☆

RoHS Compliant

REVISIONS					
REV	BCN	DESCRIPTION	DATE	DRAWN	APPROVED
B					
C					




P/N: H243S**000

Available: 2~15pins

Mate with W243

Insulator: Nylon 6/6 UL 94V-2

Color: Beige

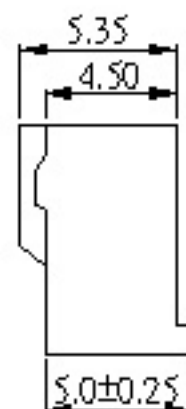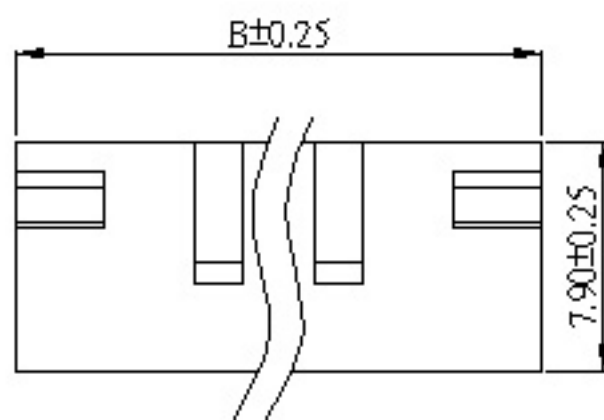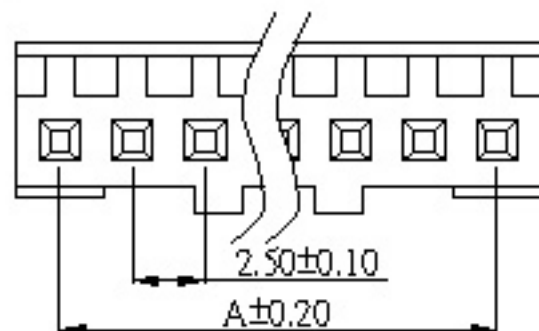

CIRCUITS	PART NO.	Dim A	Dim B
2	H243S02000	2.50	5.50
3	H243S03000	5.00	8.00
4	H243S04000	7.50	10.50
5	H243S05000	10.00	13.00
6	H243S06000	12.50	15.50
7	H243S07000	15.00	18.00
8	H243S08000	17.50	20.50
9	H243S09000	20.00	23.00
10	H243S10000	22.50	25.50
11	H243S11000	25.00	28.00
12	H243S12000	27.50	30.50
13	H243S13000	30.00	33.00
14	H243S14000	32.50	35.50
15	H243S15000	35.00	38.00

TCS 上廣電子(惠州)有限公司
Top conn electrical (HuiZhou) co.,ltd

NORMAL DIMENSION TOLERANCE

X ±0.30 X' ±2
XX ±0.20
XXX ±0.10

UNITS mm


SCALE 1:1

MATERIAL

HEAT TREATMENT

QUANTITY

THIRD ANGLE PROJECTION



SHEET 1 OF 1

TITLE

DWG NO.

DRAWN

CHECKED

APPROVED

HOUSING

H243S**000

Xe 20071222

SIZE A4

REV A

☆☆☆243 Series ☆☆☆

P/N: T243P00T00


Conductor: Phosphor Bronze/Tin Plated

Thickness: 0.2mm


RoHS Compliant

REVISIONS




REV	ECN	DESCRIPTION	DATE	DRAWN	APPROVED
B					
C					




Sec A-A



Sec B-B

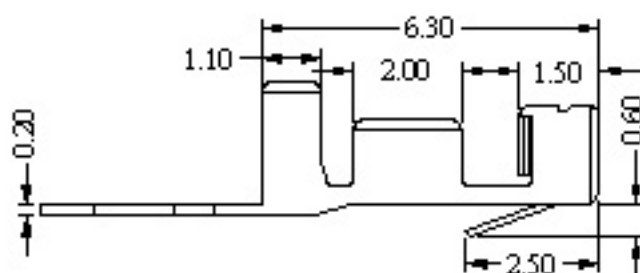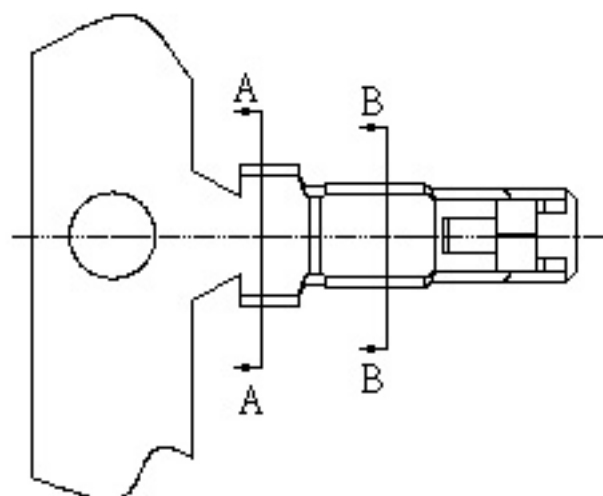

 C & J Professional

NORMAL DIMENSION TOLERANCE

.X .40.30 X'. 42"

.XX .40.20

.XXX .40.10

UNITS

mm

SCALE


1:1

MATERIAL

TREATMENT

THIRD ANGLE

PROJECTION



TITLE

Terminal

DWG NO.

T243P00T00

DRAWN

M3 2015.06.05

CHECKED

APPROVED

SIZE

A4

REV

A

QUANTITY

SHEET

1 OF 1