

☆☆☆ 262 Series ☆☆☆

P/N: W262V**GF2



Material: PBT with Glass-Filled, UL 94V-0, Black

Conductor: Brass, Gold-Flash



Available: 6~64

Mate with H262

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

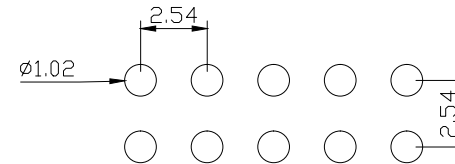

RECOMMENDED P.C.BOARD HOLE DIMM.

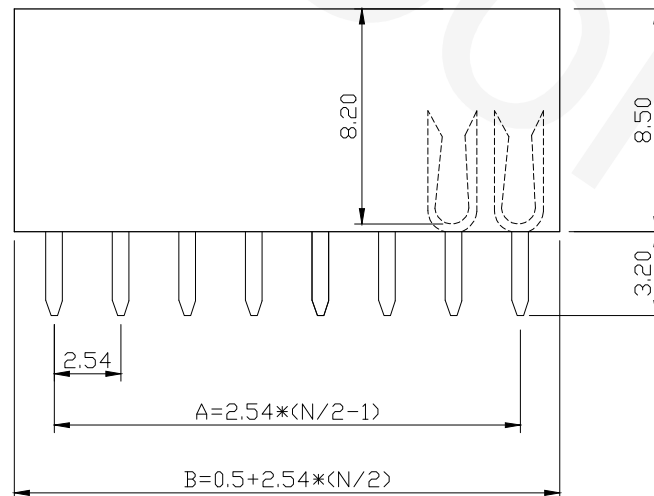

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.100"(2.54mm) Dual Row Vertical Wafer

DIMENSION TOLERANCE


.x ±0.30 x° ±2°
 .xx ±0.20
 .xxx ±0.10

P/N	W262V**GF2	CHECKED	David	UNIT	mm	DATE	2010/10/04
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A


☆☆☆ 262 Series ☆☆☆

P/N: W262VxxGFS+Cap
 Material: Nylon 6T, UL 94V-0, Natural
 Conductor: Phosphor Bronze, Gold-Flash
 Available: ?P



Current Rating: 3A
 Insulator Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Withstanding: AC 600V
 Operating Temperature: -40°C ~ 105°C

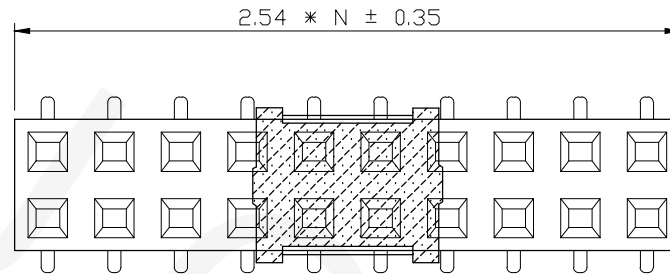

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

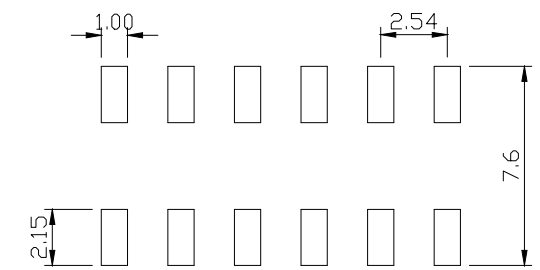

RECOMMENDED P.C.BOARD HOLE DIMM.

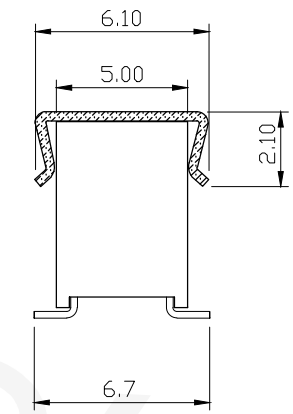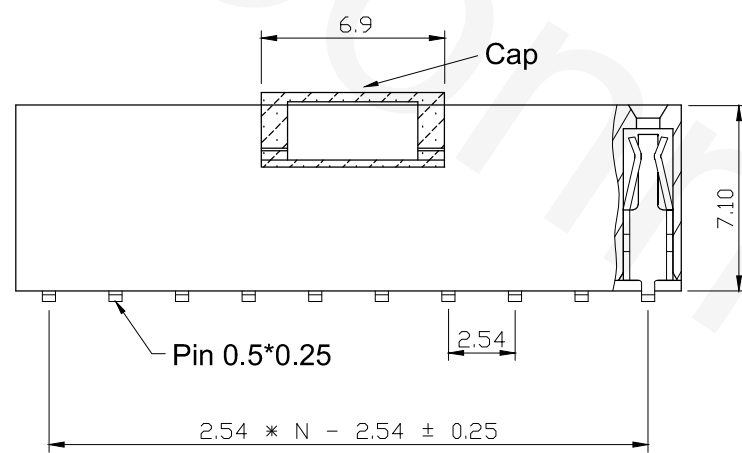

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE							DIMENSION TOLERANCE	
.100"(2.54mm) Dual Row SMT Female Header with Cap							.x ±0.30 x° ±2°	
P/N	W262VxxGFS+Cap	CHECKED	David	UNIT	mm	DATE	2011/03/10	
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A	




☆☆☆ 262 Series ☆☆☆

P/N: H262S**000

Material: PBT + 15% Glass-Filled, UL 94V-0, Black

Available: 4~80P

Mate with W262

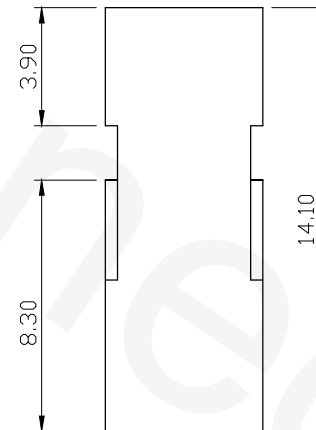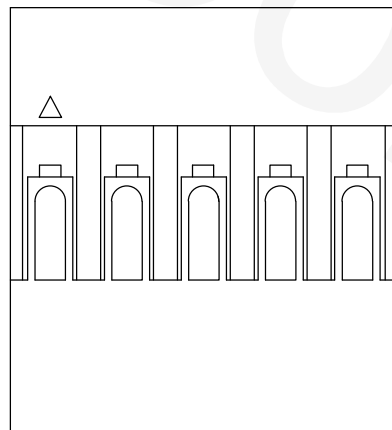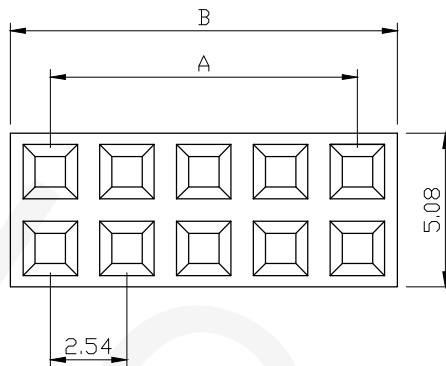

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

Circuitis	Dim. A	Dim. B
4	2.54	5.08
6	5.08	7.62
8	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
28	33.02	35.56
N	(N/2-1)*2.54	N*1.27
80	99.06	101.60

RoHS Compliant




TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE							DIMENSION TOLERANCE	
.100"(2.54mm) Wire to Board Housing							.x ±0.30 x° ±2°	
							.xx ±0.20	
							.xxx ±0.10	
P/N	H262S**000	CHECKED	David	UNIT	mm	DATE	2010/08/06	
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A	


☆☆☆ 261 Series ☆☆☆

P/N: T261B00G00-01
 Material: Brass, Gold-Flash
 Thickness: 0.2mm


REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			



Section A-A



Section B-B

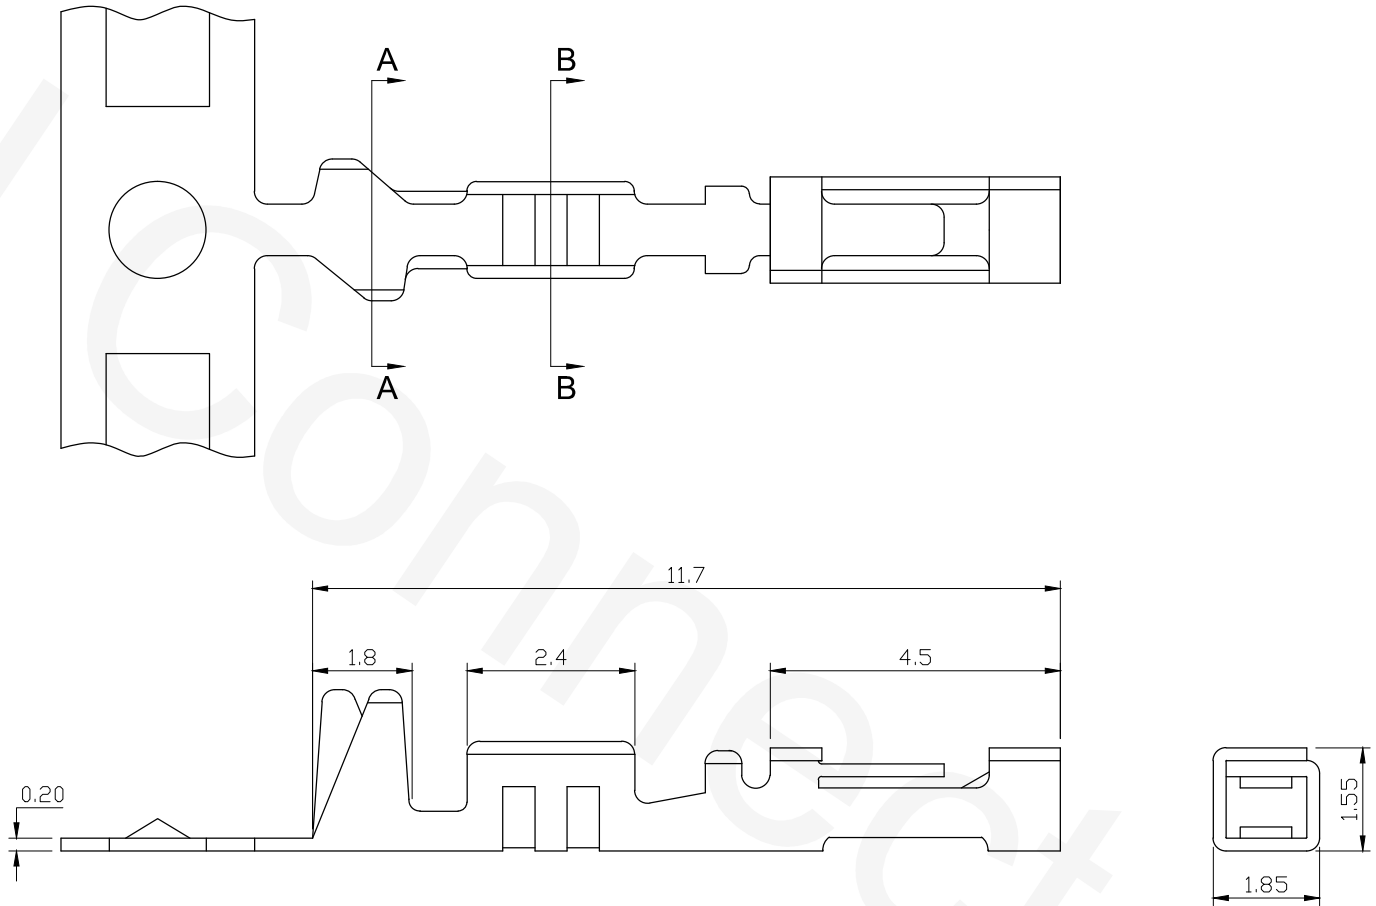

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE						DIMENSION TOLERANCE		
.100"(2.54mm) Wire to Board Crimp Terminal						.x ±0.30 x° ±2°		
						.xx ±0.20		
						.xxx ±0.10		
P/N	T261B00G00-01	CHECKED	David	UNIT	mm	DATE	2011/01/11	
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A	