

# ☆☆☆ 290 Series ☆☆☆

P/N: W290V\*\*TP1

Material: Glass-Filled Polyamide, UL 94V-0, Black

Conductor: SQ0.64, Brass, Tin-Plated





Plating: Ni 30u" Over Sn 80u"

Available: 2~12P

Mate with H290

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

RECOMMENDED P.C.BOARD HOLE DIMM.

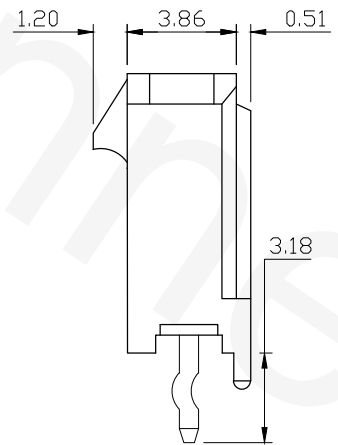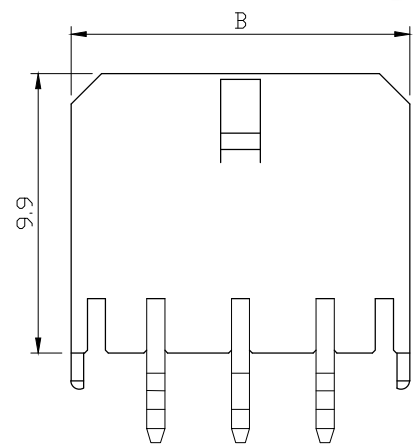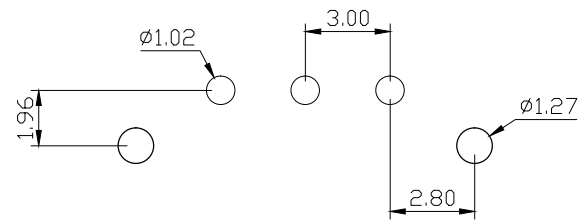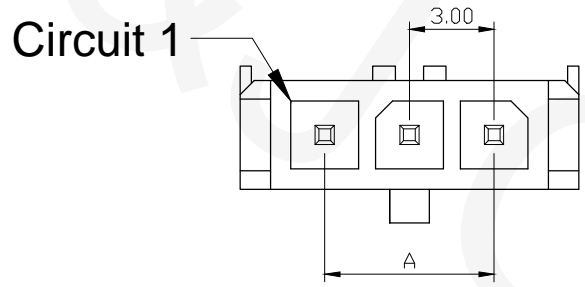

Circuitis	Dim. A	Dim. B
2	3.00	9.00
3	6.00	12.00
4	9.00	15.00
5	12.00	18.00
6	15.00	21.00
7	18.00	24.00
8	21.00	27.00
9	24.00	30.00
10	27.00	33.00
11	30.00	36.00
12	33.00	39.00

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
 .118"(3.0mm) Wire to Board Vertical Single Row Wafer with Column

DIMENSION TOLERANCE	
.x	±0.15
.xx	±0.10
.xxx	±0.05

P/N	W290V**TP1	CHECKED	David	UNIT	mm	DATE	2010/09/02
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 290 Series ☆☆☆

P/N: W290H\*\*TP1

Material: Glass-Filled Polyamide, UL 94V-0, Black

Conductor: SQ0.64, Brass, Tin-Plated

Available: 2~12P

Mate with H290


Current Rating: 5A

Voltage Rating: 250V



Contact Resistance: 10mΩ Max.

Withstanding Voltage: 15000V AC/minute

Temperature Rise: 30°C Max.

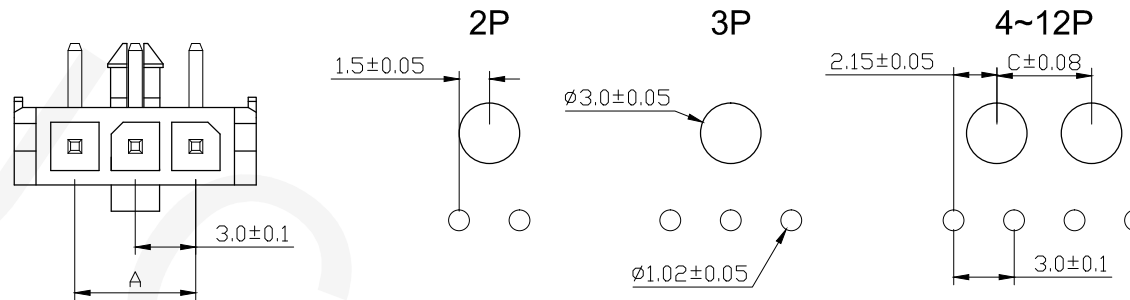

RECOMMENDED P.C.BOARD HOLE DIMM.

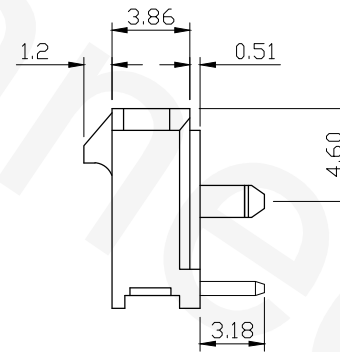

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

Circuitis	Dim. A	Dim. B
2	3.00	9.00
3	6.00	12.00
4	9.00	15.00
5	12.00	18.00
6	15.00	21.00
7	18.00	24.00
8	21.00	27.00
9	24.00	30.00
10	27.00	33.00
11	30.00	36.00
12	33.00	39.00

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
 .118"(3.0mm) Wire to Board Horizontal Single Row Wafer with Column

DIMENSION TOLERANCE  
 .x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

P/N	W290H**TP1	CHECKED	David	UNIT	mm	DATE	2010/09/02
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 290 Series ☆☆☆

P/N: W290V\*\*TP2

Material: Glass-Filled Polyamide, UL 94V-0, Black

Conductor: SQ0.64, Brass, Tin-Plated

Plating: Ni 30u" over Sn 100u"

Available: 2~24P

Mate with H290

Current Rating: 4A AC

Current Voltage: 250V AC


Withstanding Voltage: 1500V AC/minute

Contact Resistance: 10mΩ Max.




Insulation Resistance: 1000Ω Min.

Operating Temperature: -40°C~105°C

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

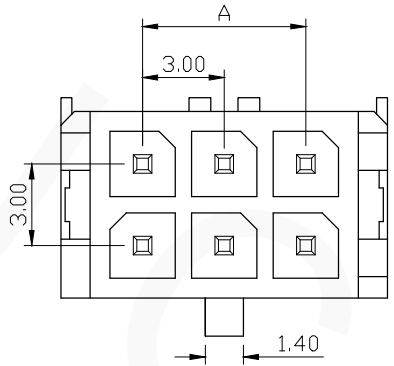

**RECOMMENDED P.C.BOARD HOLE DIMM.**

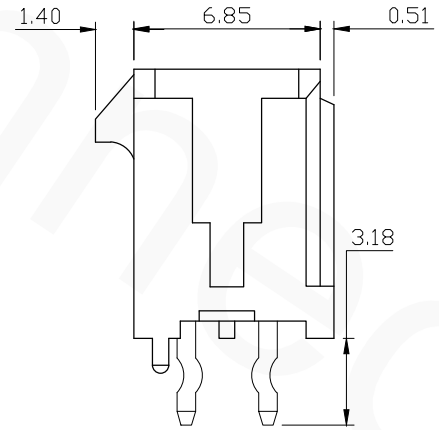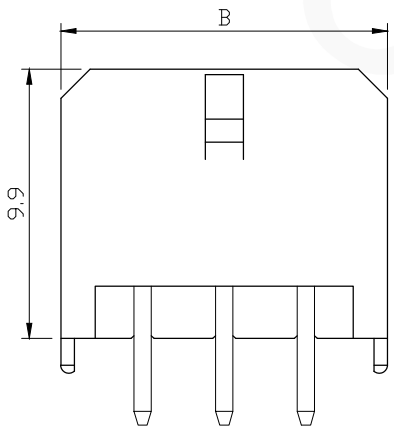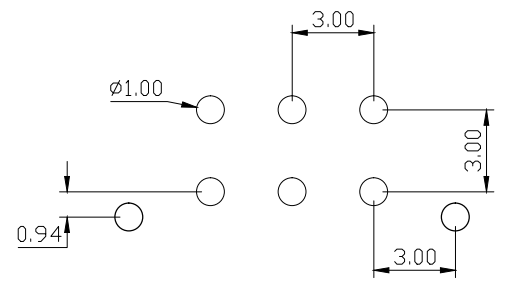

Circuitis	Dim. A	Dim. B
2		6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/













TITLE  
 .118"(3.0mm) Wire to Board Vertical Dual Row Wafer with Column

DIMENSION TOLERANCE	
.x	±0.30 x° ±2°
.xx	±0.20
.xxx	±0.10

P/N	W290V**TP2	CHECKED	David	UNIT	mm	DATE	2010/09/02
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 290 Series ☆☆☆

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

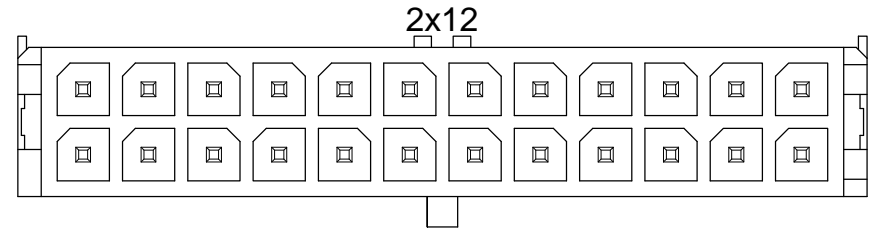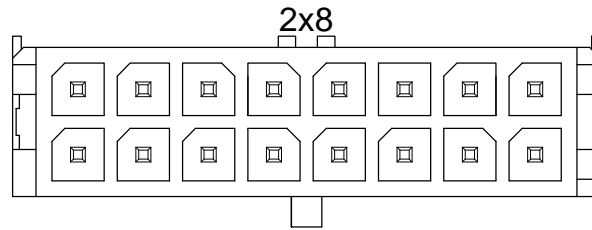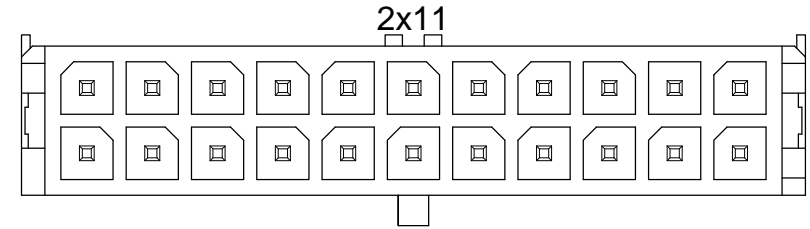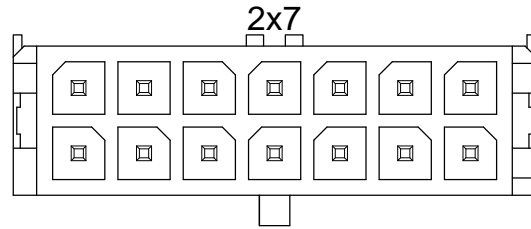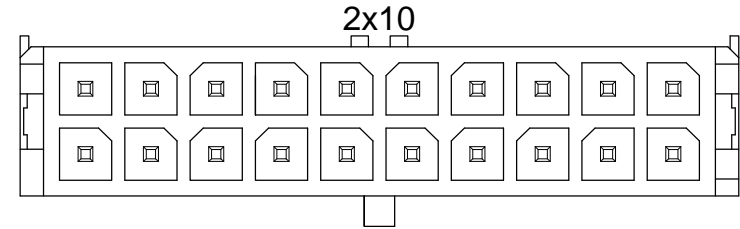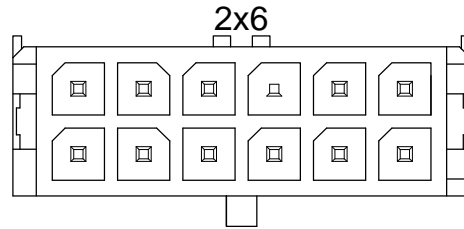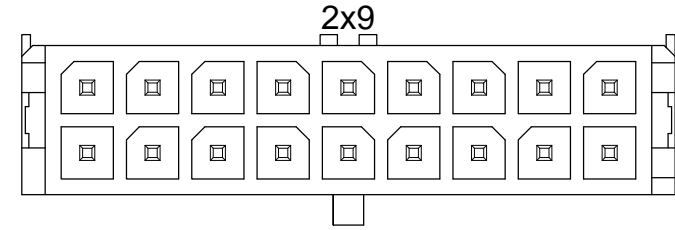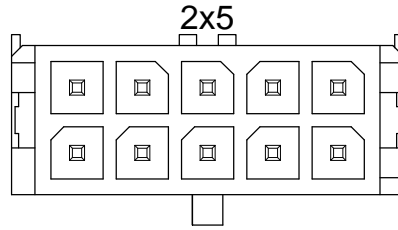

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
 .118"(3.0mm) Wire to Board Vertical Dual Row Wafer with Column

DIMENSION TOLERANCE	
.x	±0.10
.xx	±0.05
.xxx	±0.02

P/N	W290V**TP2	CHECKED	David	UNIT	mm	DATE	2010/09/02
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 290 Series ☆☆☆


P/N: W290H\*\*TP2

Material: Glass-Filled Polyamide, UL 94V-0, Black

Conductor: SQ0.64, Brass, Tin-Plated



Available: 2~24P

Mate with H290

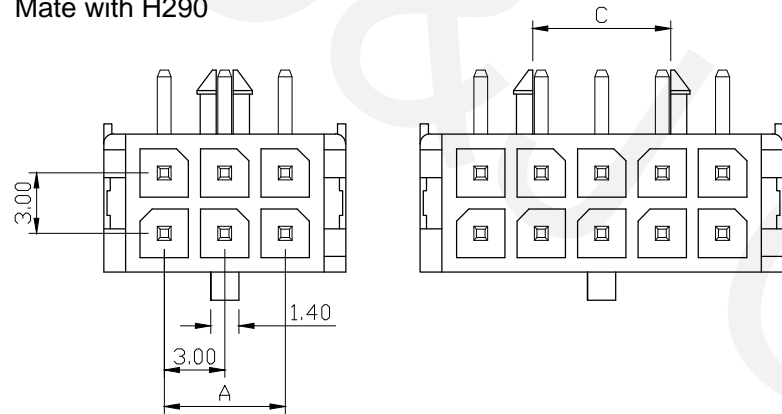

2P~6P

8P~24P

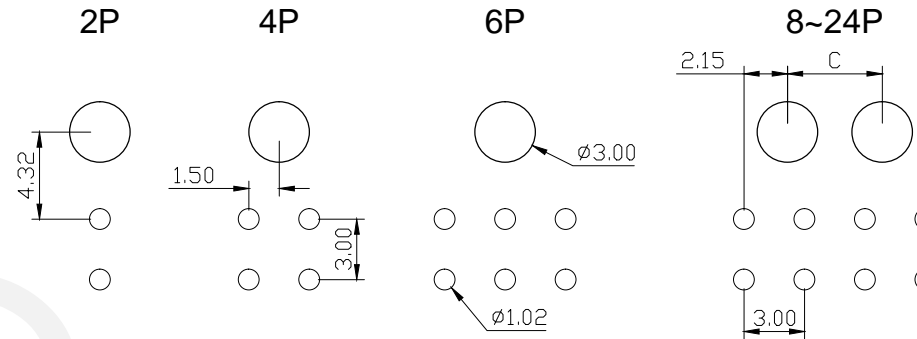

RECOMMENDED P.C.BOARD HOLE DIMM.

Circuitis	Dim. A	Dim. B	Dim. C
2		6.65	
4	3.00	9.65	
6	6.00	12.65	
8	9.00	15.65	5.83
10	12.00	18.65	8.83
12	15.00	21.65	11.83
14	18.00	24.65	14.83
16	21.00	27.65	17.83
18	24.00	30.65	20.83
20	27.00	33.65	23.83
22	30.00	36.65	26.83
24	33.00	39.65	29.83

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
.118"(3.0mm) Wire to Board Horizontal Dual Row Wafer with Column


DIMENSION TOLERANCE  
.x ±0.30 x° ±2°  
.xx ±0.20  
.xxx ±0.10

P/N	W290H**TP2	CHECKED	David	UNIT	mm	DATE	2010/09/02
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A	Dimension C Added	2012/05/29	Mike

☆☆☆ 290 Series ☆☆☆

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

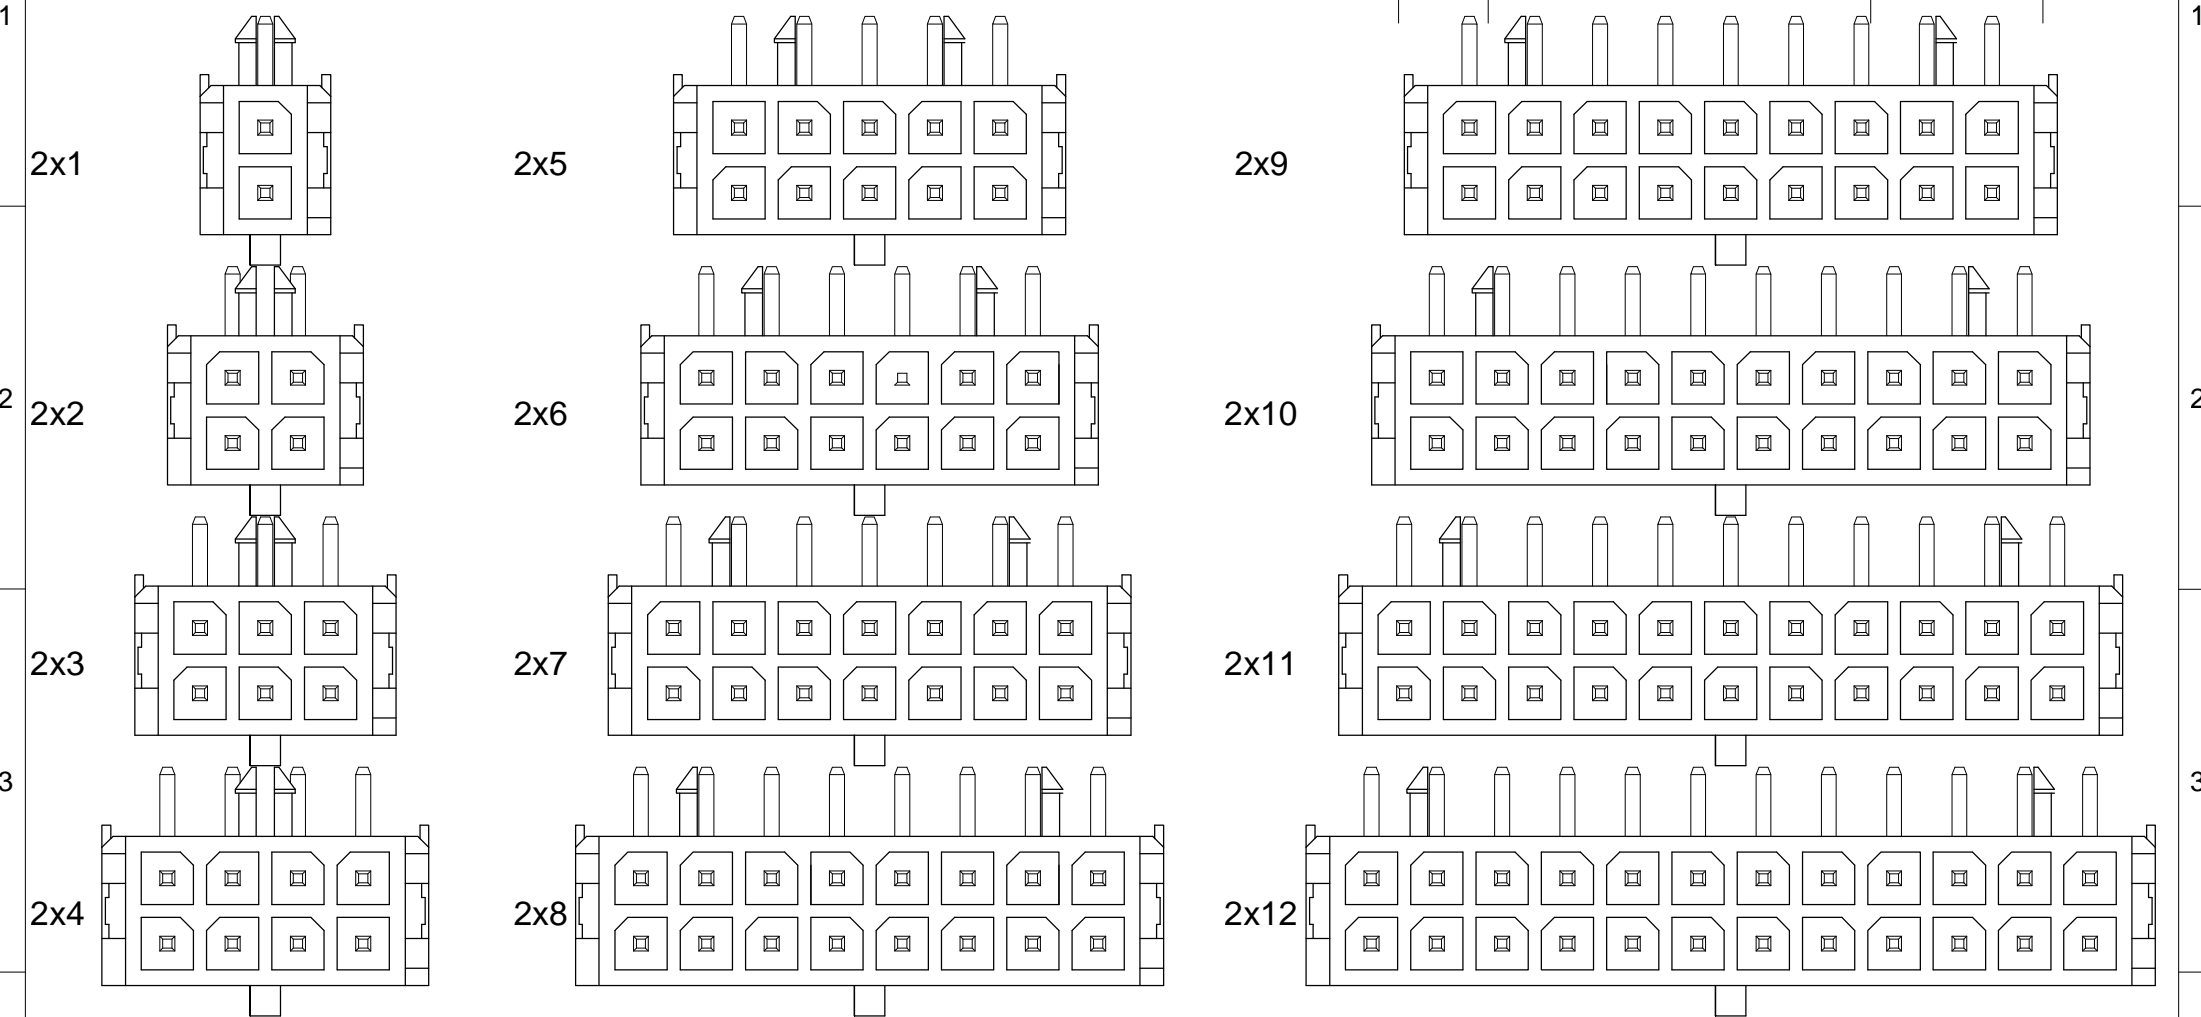

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
 .118"(3.0mm) Wire to Board Horizontal Dual Row Wafer with Column

DIMENSION TOLERANCE	
.x	±0.30 x° ±2°
.xx	±0.20
.xxx	±0.10

P/N	W290H**TP2	CHECKED	David	UNIT	mm	DATE	2010/09/02
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

A B C D E F

# ☆☆☆ 290 Series ☆☆☆

P/N: W290V\*\*T1S


Material: LCP

Conductor: Brass, Tin-Plated

Available: 2~12P

Mate with H290

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

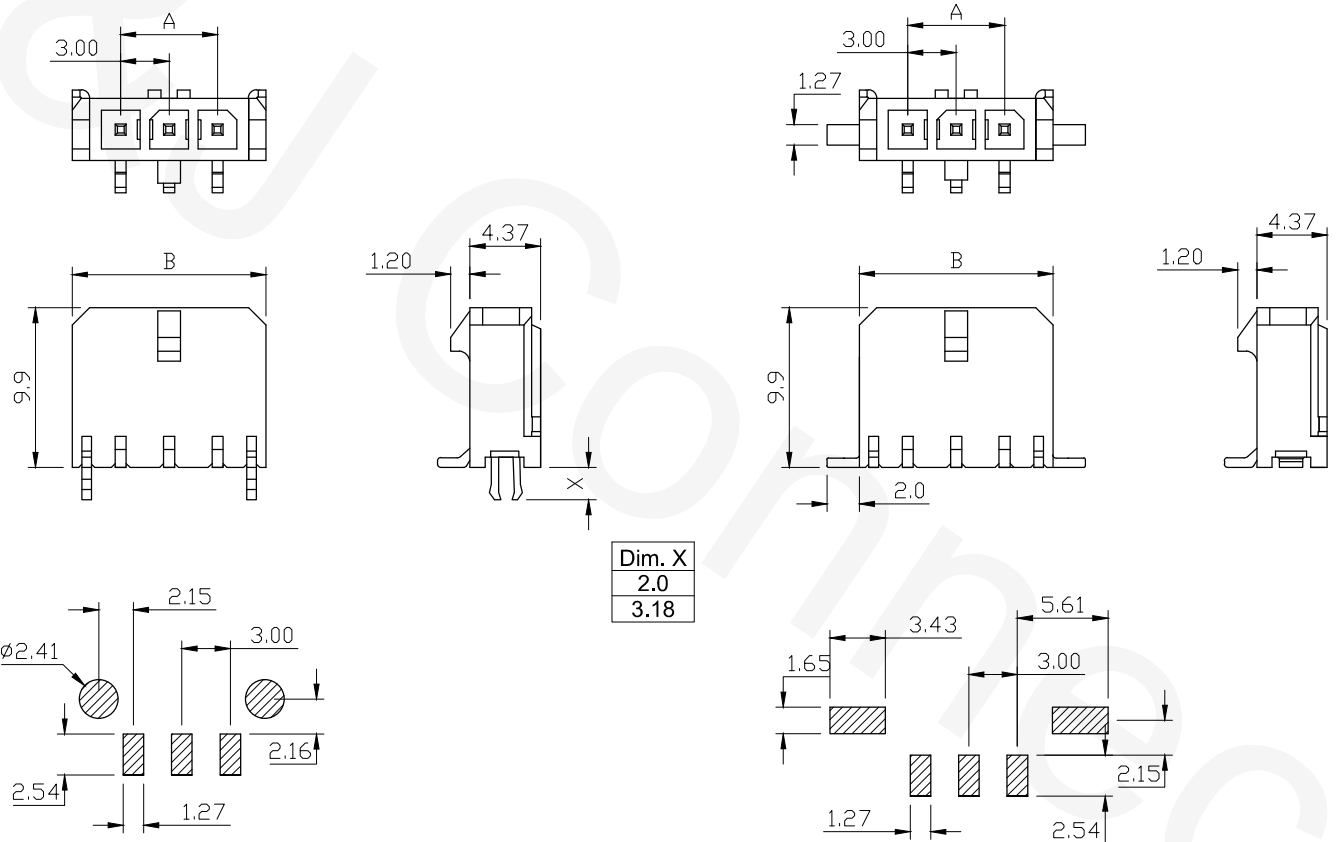

Dim. X
2.0
3.18

Circuitis	Dim. A	Dim. B
2	3.00	9.65
3	6.00	12.65
4	9.00	15.65
5	12.00	18.65
6	15.00	21.65
7	18.00	24.65
8	21.00	27.65
9	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

RECOMMENDED P.C.BOARD HOLE DIMM.

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
 .079"(2.0mm) Wire to Board Single Row Vertical SMT Wafer

DIMENSION TOLERANCE	
.x	±0.30 x° ±2°
.xx	±0.20
.xxx	±0.10

P/N	W290V**T1S	CHECKED	David	UNIT	mm	DATE	2010/08/25
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 290 Series ☆☆☆

P/N: W290H\*\*T1S



Material: LCP, UL 94V-0, Black

Conductor: Brass, Tin-Plated







Available: 2~12P

Mate with H290

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

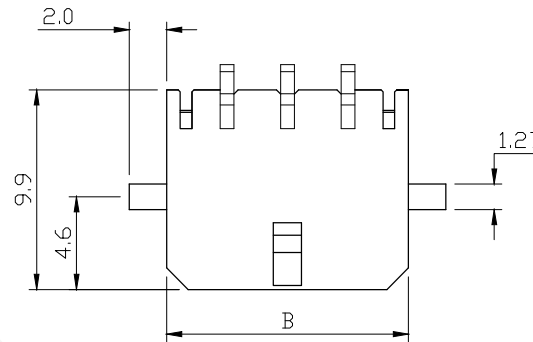

Dim X
2.00
3.20

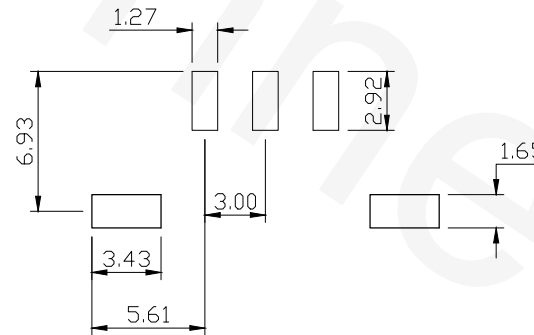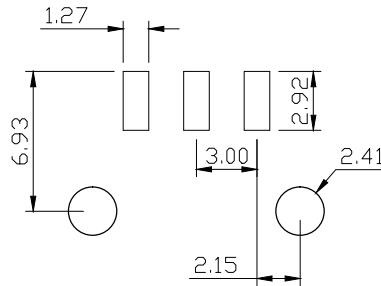

Circuitis	Dim. A	Dim. B
2	3.00	9.65
3	6.00	12.65
4	9.00	15.65
5	12.00	18.65
6	15.00	21.65
7	18.00	24.65
8	21.00	27.65
9	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65

RoHS Compliant

RECOMMENDED P.C.BOARD HOLE DIMM.



TEL: 886-2-86871898 FAX: 886-2-86872959  
Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
.118(3.0mm) Wire to Board Horizontal SMT Wafer

DIMENSION TOLERANCE  
.x ±0.30 x° ±2°  
.xx ±0.20  
.xxx ±0.10

P/N	W290HxxT1S	CHECKED	David	UNIT	mm	DATE	2010/11/26
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A



# ☆☆☆ 290 Series ☆☆☆

P/N: W290V\*\*T2S









Material: LCP

Conductor: Brass, Tin-Plated

Available: 2~24P

Mate with H290

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

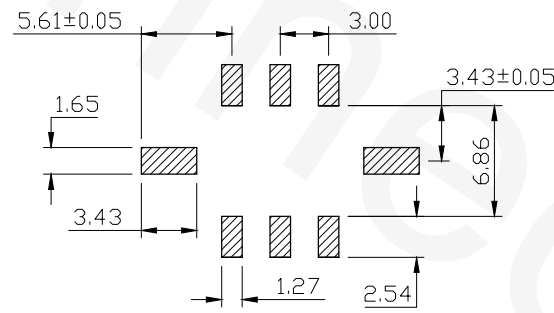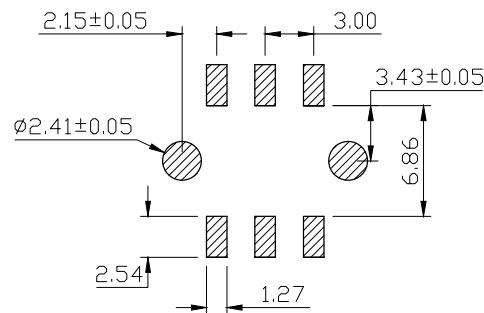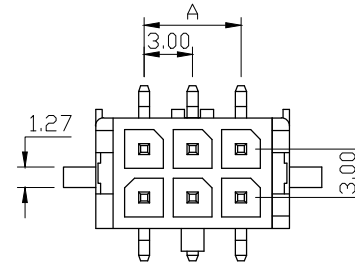

RECOMMENDED P.C.BOARD HOLE DIMM.

Circuitis	Dim. A	Dim. B
2		6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

RoHS Compliant



TITLE  
 .079"(2.0mm) Wire to Board Vertical SMT Dual Row Wafer

DIMENSION TOLERANCE  
 .x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/



P/N	W290V**T2S	CHECKED	David	UNIT	mm	DATE	2010/08/25
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 290 Series ☆☆☆

P/N: W290H\*\*T2S-FN  
 Material: LCP, UL 94V-0, Black  
 Conductor: Brass, Tin-Plated  
 Available: 2~24P  
 Mate with H290

Current Rating: 5A AC/DC  
 Voltage Rating: 250V AC/DC  
 Dielectric Withstanding Voltage: 1500 AC/minute

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

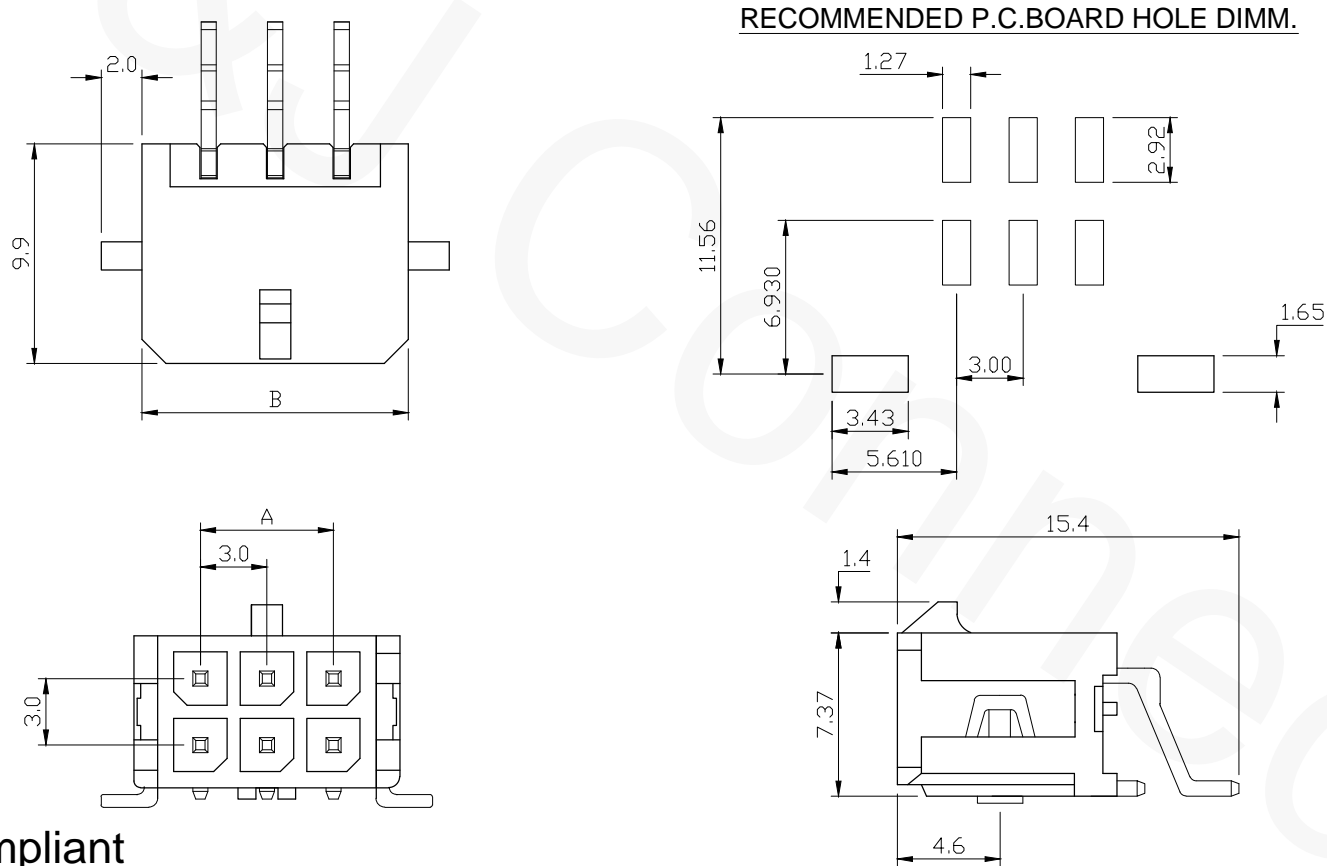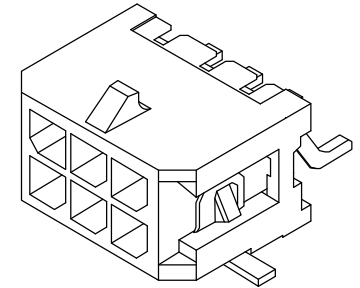

Circuitis	Dim. A	Dim. B
2	2.50	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
 .118"(3.0mm) Wire to Board Dual Row Horizontal Wafer with FN

DIMENSION TOLERANCE	
.x	±0.15
.xx	±0.10
.xxx	±0.05

P/N	W290H**T2S-FN	CHECKED	David	UNIT	mm	DATE	2010/11/12
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 290 Series ☆☆☆

P/N: W290H\*\*T2S-RC

Material: LCP, UL 94V-0, Black

Conductor: Brass, Tin-Plated

Available: 2~24P

Mate with H290



Current Rating: 5A AC/DC

Voltage Rating: 250V AC/DC



Contact Resistance: 10mΩ Max.

Dielectric Withstanding Voltage: 1500 AC/minute

Operating Temperature: -25°C~105°C

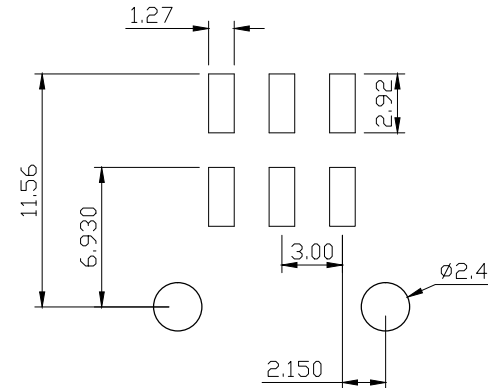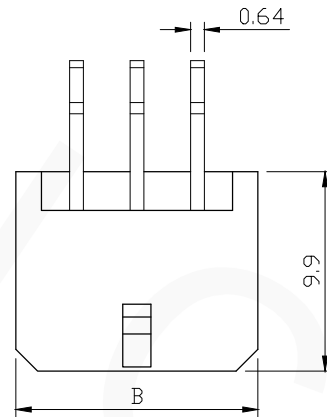

RECOMMENDED P.C.BOARD HOLE DIMM.

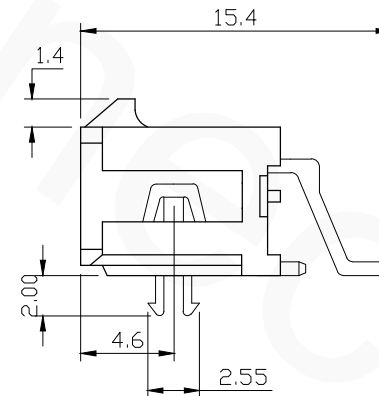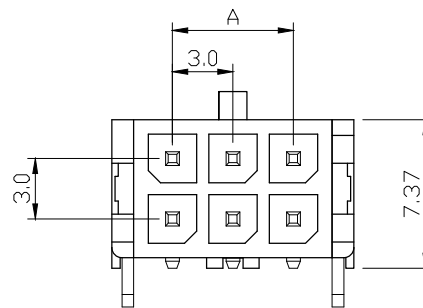

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

Circuitis	Dim. A	Dim. B
2	2.50	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
.118"(3.0mm) Wire to Board Dual Row Horizontal Wafer with RC

DIMENSION TOLERANCE  
.x ±0.30 x° ±2°  
.xx ±0.20  
.xxx ±0.10

P/N	W290H**T2S-RC	CHECKED	David	UNIT	mm	DATE	2010/11/12
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 290 Series ☆☆☆


P/N: H290M\*\*000

Material: Glass-Filled Polyamide, UL 94V-0, Black

Available: 2~24P

Mate with W290

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A	Dim. Added	2013.7.10	Mike

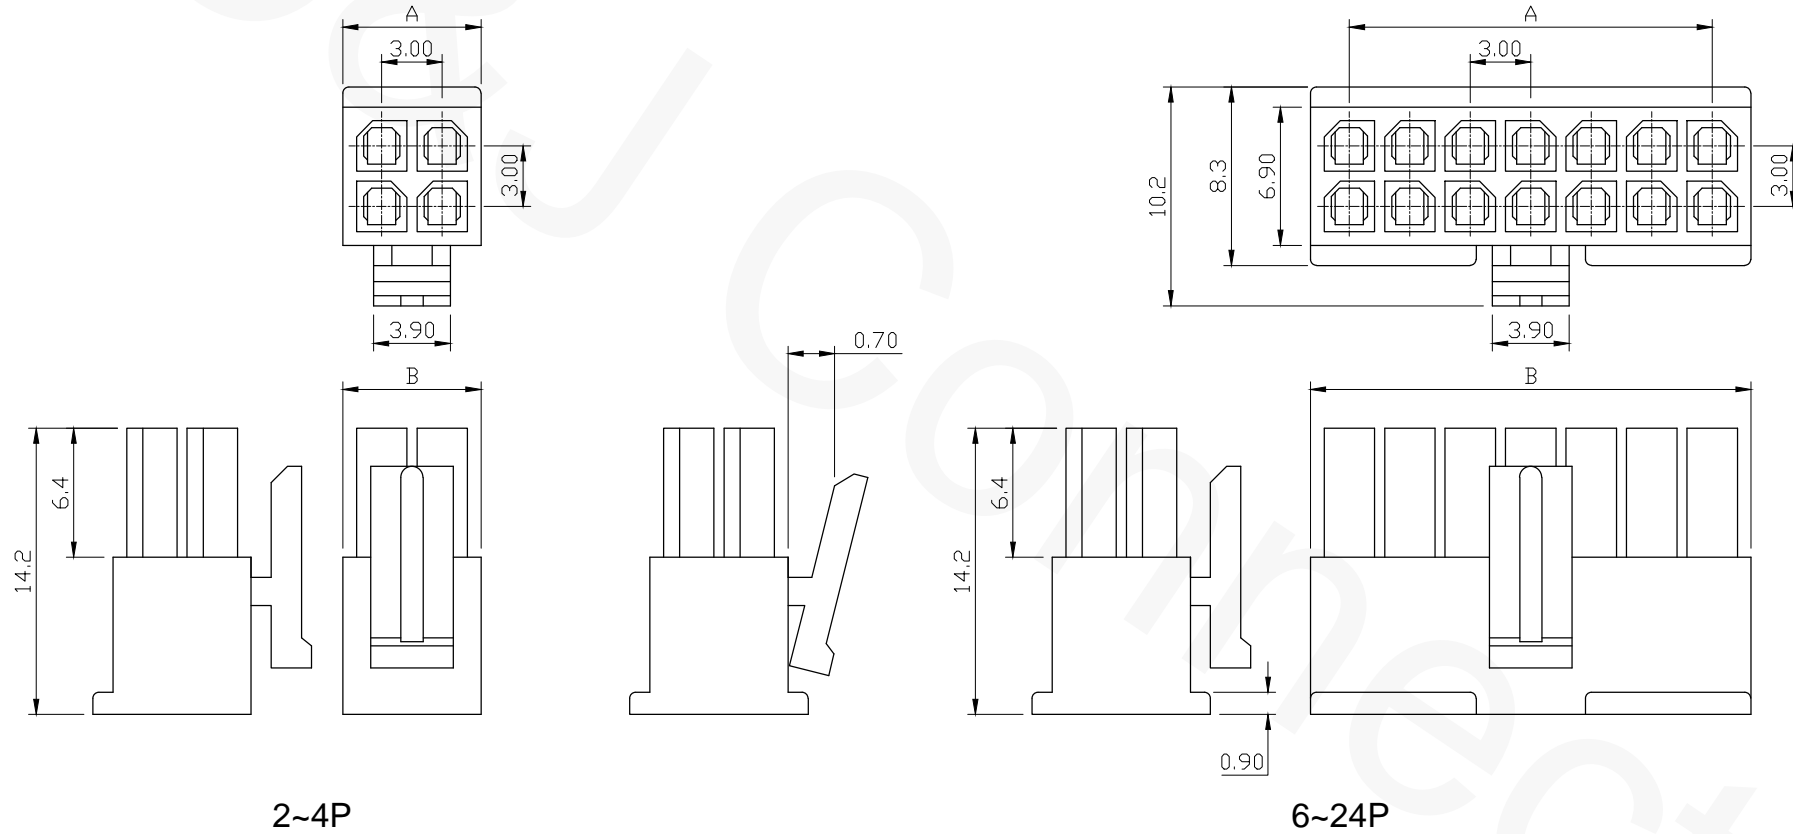

Circuits	Dim. A	Dim. B
2		4
4	3	7
6	6	10
8	9	13
10	12	16
12	15	19
14	18	22
16	21	25
18	24	28
20	27	31
22	30	34
24	33	37

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
 .118"(3.0mm) Micro Fit Dual Row Male Housing

DIMENSION TOLERANCE

.x	±0.15	φ	±0.15
.xx	±0.10		
.xxx	±0.05		

P/N	W290M**000	CHECKED	David	UNIT	mm	DATE	2013/07/16
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A




☆☆☆ 290 Series ☆☆☆

P/N: H290F\*\*000

Material: Nylon 6/6, UL 94V-0, Black

Available: 2~24P

Mate with W290

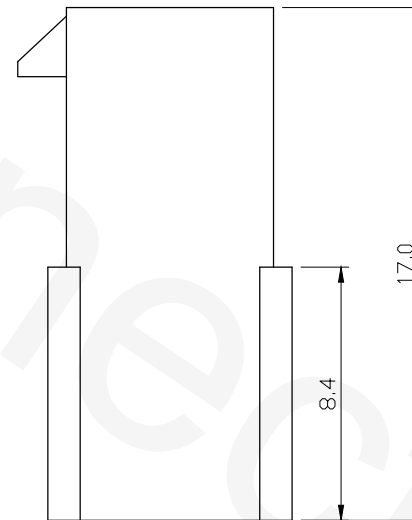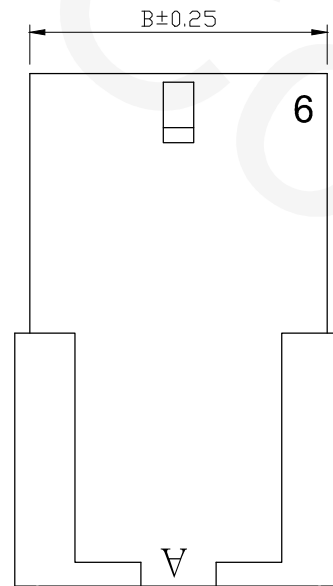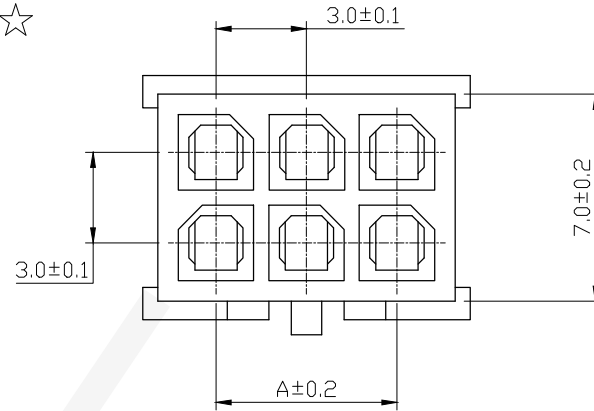

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

Circuitis	Dim. A	Dim. B
2		4.00
4	3.00	7.00
6	6.00	10.00
8	9.00	13.00
10	12.00	16.00
12	15.00	19.00
14	18.00	22.00
16	21.00	25.00
18	24.00	28.00
20	27.00	31.00
22	30.00	34.00
24	33.00	37.00

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.118"(3.0mm) Wire to Board Female Housing

DIMENSION TOLERANCE

.x ±0.30 x° ±2°  
.xx ±0.20  
.xxx ±0.10

P/N	H290F**000	CHECKED	David	UNIT	mm	DATE	2010/08/03
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

# ☆☆☆ 290 Series ☆☆☆




P/N: H290F\*\*0E0

Material: Glass-Filled Polyamide, UL 94V-0, Black

Available: 2~24P

Mate with W290

Circuitis	Dim. A	Dim. B
2		4.00
4	3.00	7.00
6	6.00	10.00
8	9.00	13.00
10	12.00	16.00
12	15.00	19.00
14	18.00	22.00
16	21.00	25.00
18	24.00	28.00
20	27.00	31.00
22	30.00	34.00
24	33.00	37.00

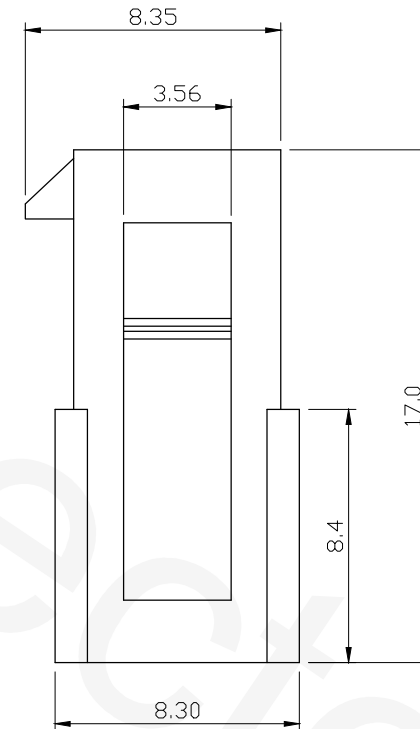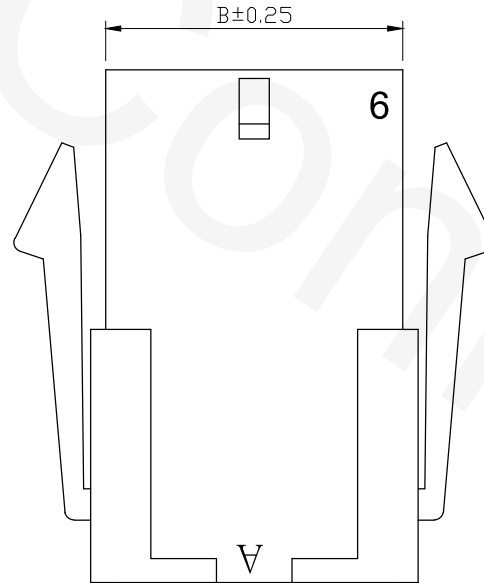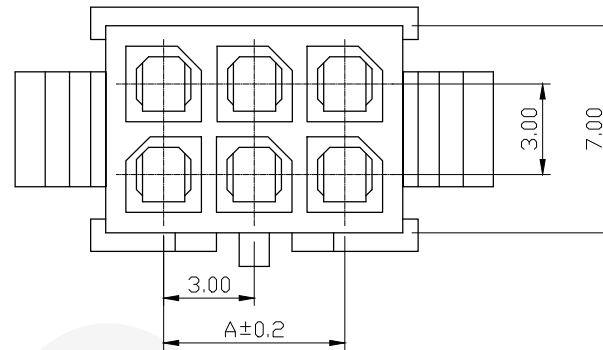

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE  
 .118"(3.0mm) Wafer to Board Female Eared Wafer

DIMENSION TOLERANCE  
 .x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

P/N	H290F**0E0	CHECKED	David	UNIT	mm	DATE	2010/09/03
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A



# ☆☆☆ 290 Series ☆☆☆

P/N: H290M\*\*001

Material: Glass-Filled Polyamide, UL 94V-0, White/Black


Available: 2~12P

Mate with W290F

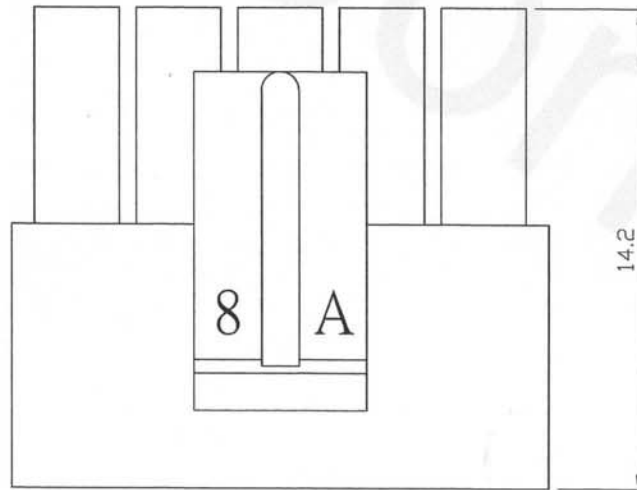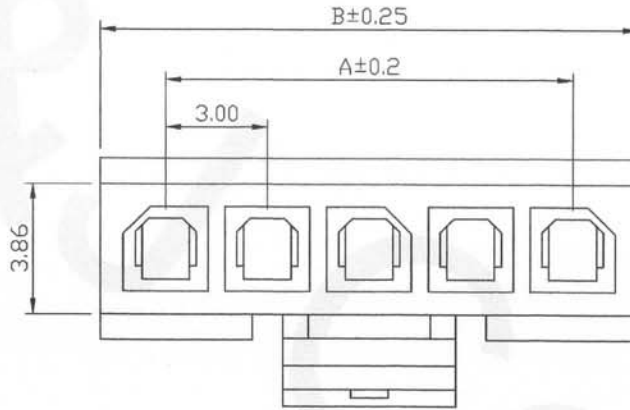

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

Circuitis	Dim. A	Dim. B
2	3.00	7.00
3	6.00	10.00
4	9.00	13.00
5	12.00	16.00
6	15.00	19.00
7	18.00	22.00
8	21.00	25.00
9	24.00	28.00
10	27.00	31.00
11	30.00	34.00
12	33.00	37.00

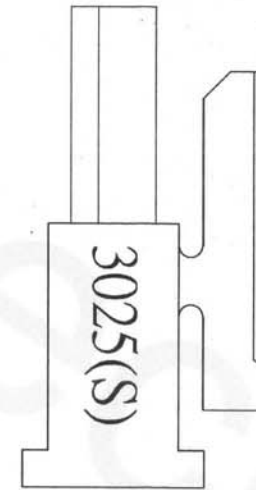

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.118"(3.0mm) Wire to Board Male Housing

DIMENSION TOLERANCE

.x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

P/N	H290M**001	CHECKED	David	UNIT	mm	DATE	2010/08/13
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A




# ☆☆☆ 290 Series ☆☆☆

P/N: H290F\*\*001

Material: Glass-Filled Polyamide, UL 94V-0, Black

Available: 2~12P

Mate with H290M

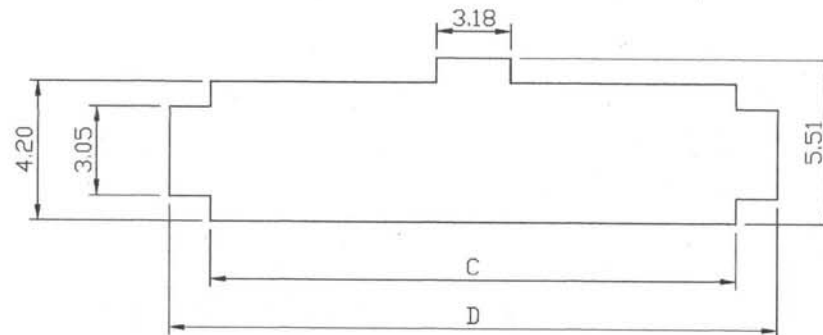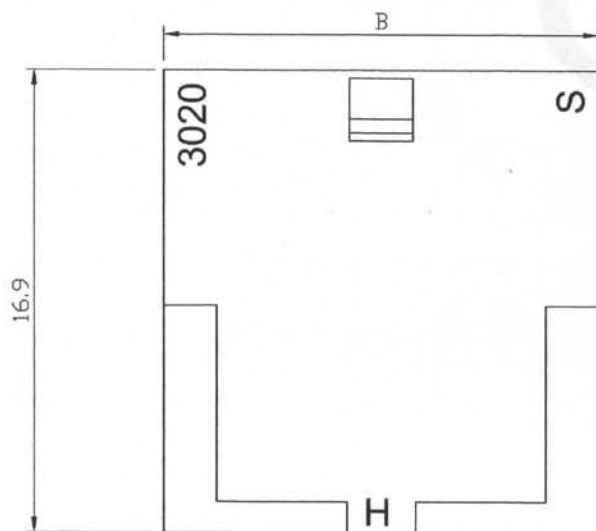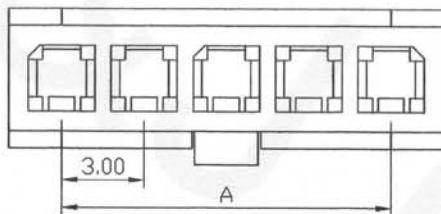

### RECOMMENDED P.C.BOARD HOLE DIMM.

Circuitis	Dim. A	Dim. B	Dim. C	Dim. D
2	3.00	6.85	7.21	10.90
3	6.00	9.85	10.21	13.90
4	9.00	12.85	13.21	16.90
5	12.00	15.85	16.21	19.90
6	15.00	18.85	19.21	22.90
7	18.00	21.85	22.21	25.90
8	21.00	24.85	25.21	28.90
9	24.00	27.85	28.21	31.90
10	27.00	30.85	31.21	34.90
11	30.00	33.85	34.21	37.90
12	33.00	36.85	37.21	40.90

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.118"(3.0mm) Wire to Board Female Housing

DIMENSION TOLERANCE

.x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

P/N	H290F**001	CHECKED	David	UNIT	mm	DATE	2010/11/03
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A



# ☆☆☆ 290 Series ☆☆☆





P/N: H290F\*\*0E1

Material: Glass-Filled Polyamide, UL 94V-0, Black

Available: 2~12P

Mate with H290M

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

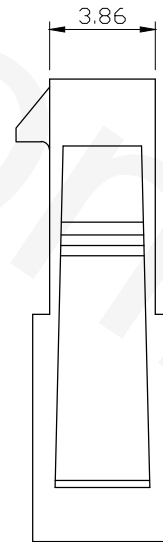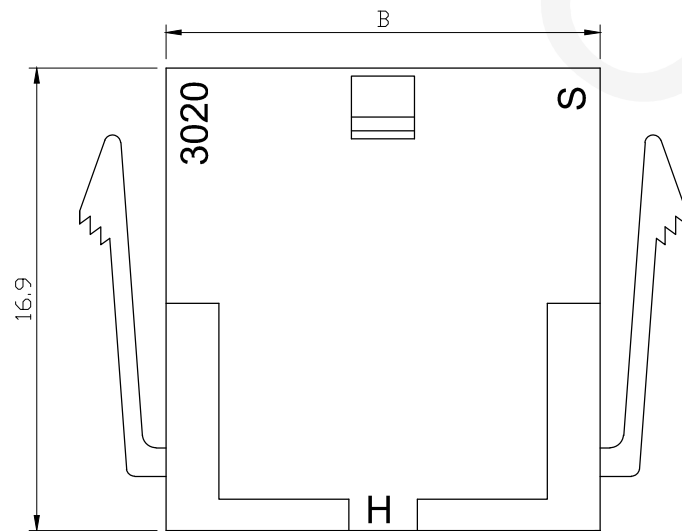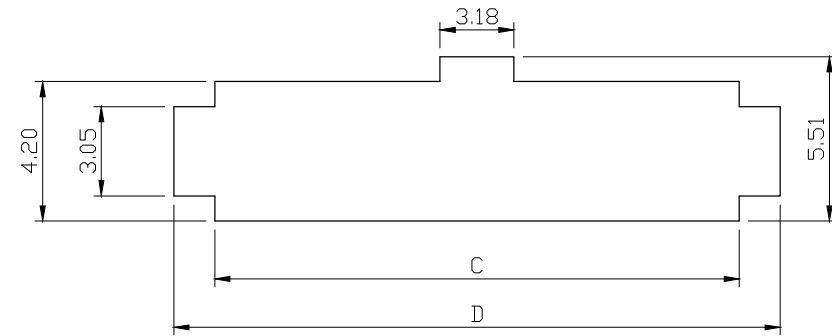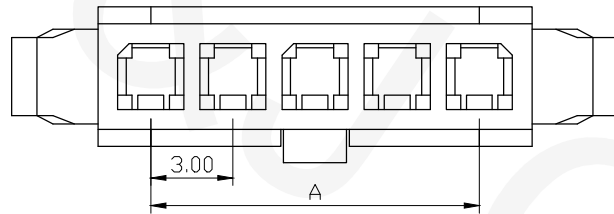

**RECOMMENDED P.C.BOARD HOLE DIMM.**

Circuitis	Dim. A	Dim. B	Dim. C	Dim. D
2	3.00	6.85	7.21	10.90
3	6.00	9.85	10.21	13.90
4	9.00	12.85	13.21	16.90
5	12.00	15.85	16.21	19.90
6	15.00	18.85	19.21	22.90
7	18.00	21.85	22.21	25.90
8	21.00	24.85	25.21	28.90
9	24.00	27.85	28.21	31.90
10	27.00	30.85	31.21	34.90
11	30.00	33.85	34.21	37.90
12	33.00	36.85	37.21	40.90

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.118"(3.0mm) Wire to Board Female Housing

DIMENSION TOLERANCE

.x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

P/N	H290F**0E1	CHECKED	David	UNIT	mm	DATE	2010/11/03
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A


☆☆☆ 290 Series ☆☆☆

P/N: T290PM0T00


Conductor: Phosphor Bronze/ Tin-Plated

Thickness: 0.2mm



REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			



Section A-A



Section B-B

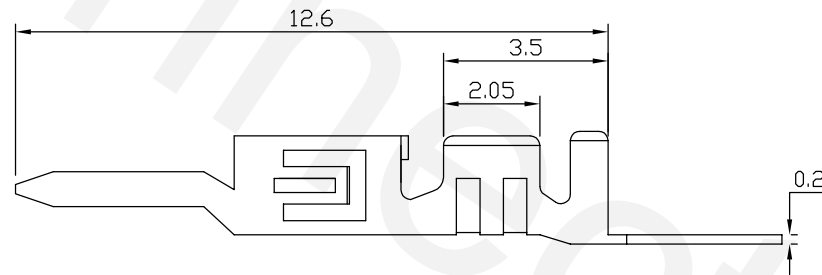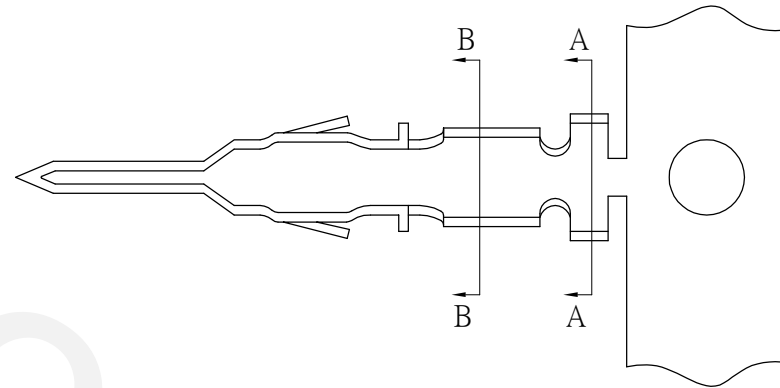

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.079"(2.0mm) Crimp Terminal

DIMENSION TOLERANCE

.x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

P/N	T290PM0T00	CHECKED	David	UNIT	mm	DATE	2010/08/05
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A


☆☆☆ 290 Series ☆☆☆

P/N: T290PF0T00


Conductor: Phosphor Bronze/ Tin-Plated

Thickness: 0.2mm


REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			



Section A-A



Section B-B

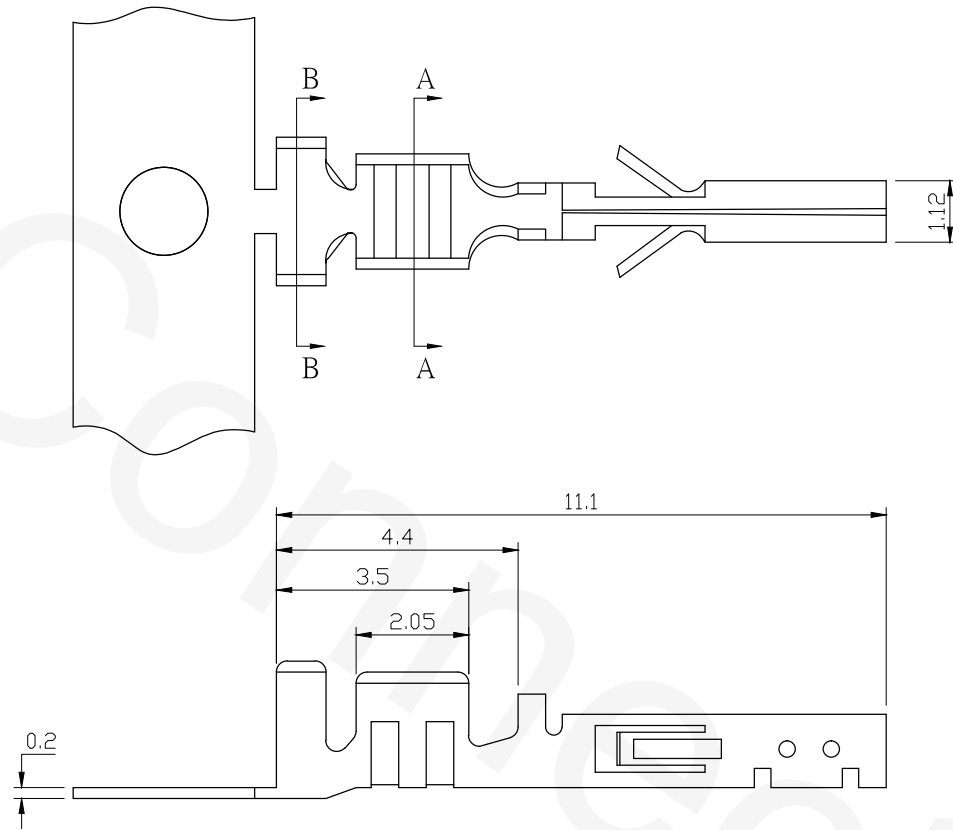

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959  
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.079"(2.0mm) Crimp Terminal

DIMENSION TOLERANCE

.x ±0.30 x° ±2°  
 .xx ±0.20  
 .xxx ±0.10

P/N	T290PF0T00	CHECKED	David	UNIT	mm	DATE	2010/08/04
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A