

☆☆☆ 303 Series ☆☆☆



P/N: H303S**000

Material: Nylon 6/6, UL 94V-0

Available: 2~15P


Current Rating: 7A AC/DC

Voltage Rating: 250V AC/DC

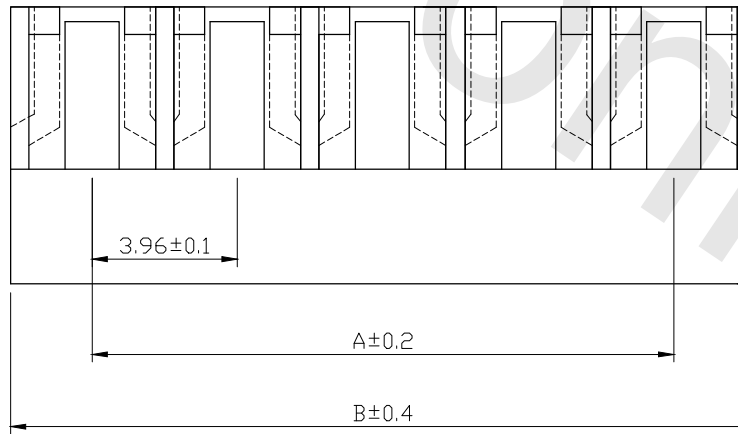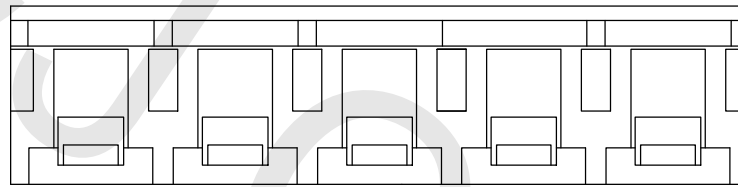

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

Circuitis	Dim. A	Dim. B
2	3.96	8.42
3	7.92	12.38
4	11.88	16.34
5	15.84	20.30
6	19.80	24.26
7	23.76	28.22
8	27.72	32.18
9	31.68	36.14
10	35.64	40.10
11	39.60	44.06
12	43.56	48.02
13	47.52	51.98
14	51.48	55.94
15	55.44	59.90

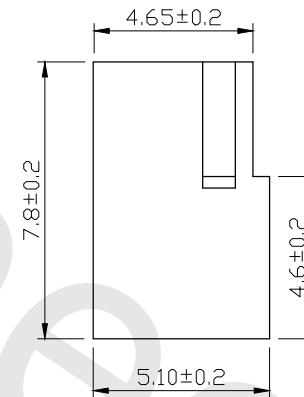

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.156"(3.96mm) Wire to Board Standard Housing

DIMENSION TOLERANCE

.x ±0.15mm
 .xx ±0.10mm
 .xxx ±0.05mm

P/N	H303S**000	CHECKED	David	UNIT	mm	DATE	2011/01/21
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 303 Series ☆☆☆

P/N: T303B00T00



Conductor: Brass, Tin-Plated

Thickness: 0.2mm

Wire Range: AWG #18~#22


Current Rating: 5A AC/DC

Voltage Rating: 250V AC/DC



X	2.30	2.80
---	------	------

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

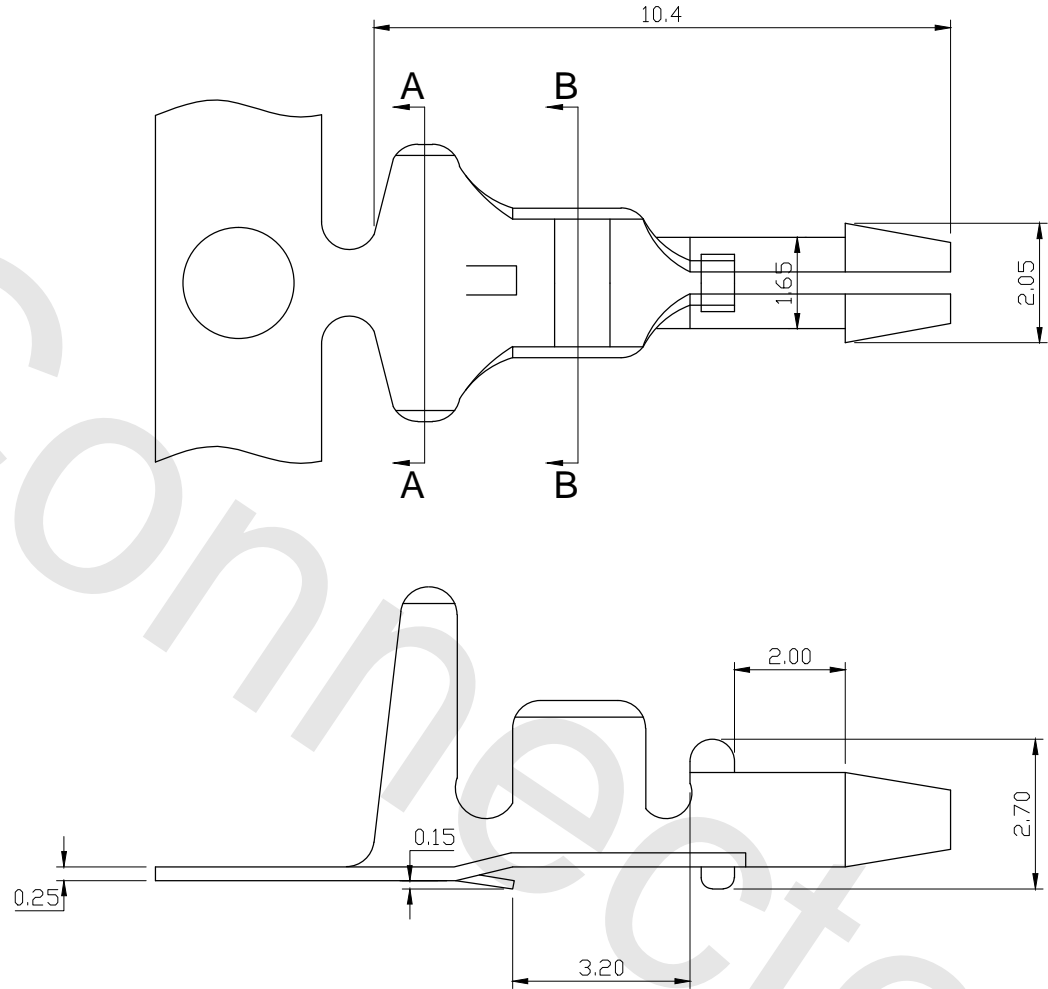

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
 Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.156"(3.96mm) Wire to Board Crimp Terminal

DIMENSION TOLERANCE

.x	±0.10	φ	±0.05
.xx	±0.05		
.xxx	±0.02		

P/N	T303B00T00	CHECKED	David	UNIT	mm	DATE	2011/01/21
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A