

☆☆☆ 301 Series ☆☆☆

P/N: H310S**00C-*N

Material: Nylon 6/6, UL 94V-2

Conductor: Phosphor Bronze, Tin Plated

Wire Range: AWG #18~#26

Available: 2~18P

Current Rating: 7A AC/DC

Voltage Rating: 250V AC Max.

Dielectric Withstanding Voltage: 1500V AC/minute

Dielectric Withstanding Voltage: 1500V AC/minute


Dielectric Withstanding Voltage: 1500V AC/minute

Dielectric Withstanding Voltage: 1500V AC/minute


Dielectric Withstanding Voltage: 1500V AC/minute

C	Color	Wire Size
3	Orange	#18
4	Yellow	#20
2	Red	#22
9	White	#24
6	Blue	#26


H310S**00C-1N

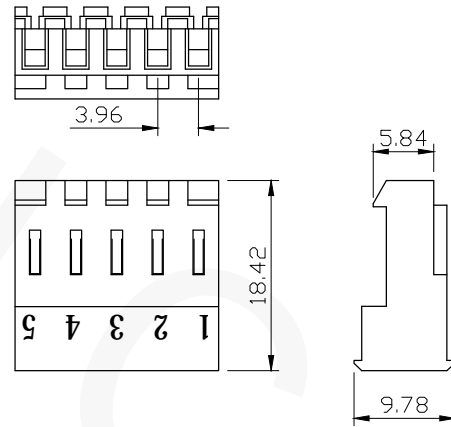


H310S**00C-2N

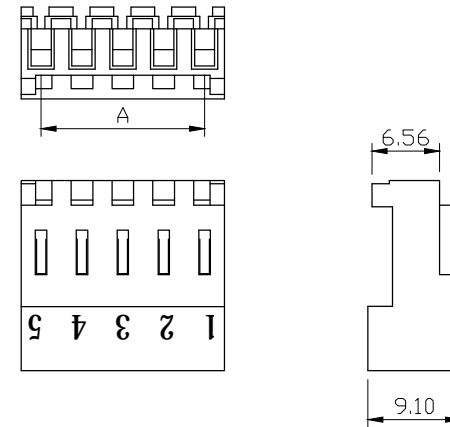

H310S**00C-3N

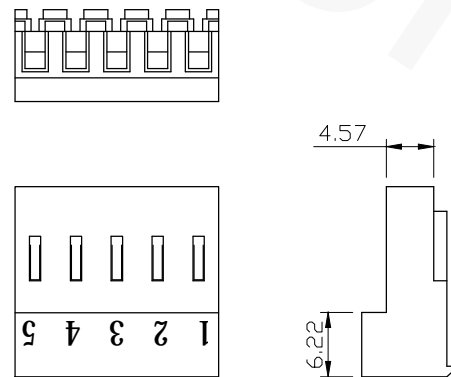

H310S**00C-4N

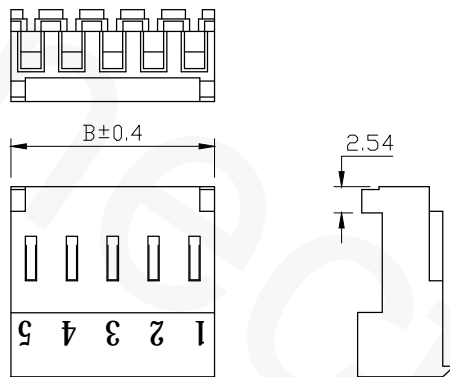

Circuitis	Dim. A	Dim. B
2	3.96	7.92
3	7.92	11.88
4	11.88	15.84
5	15.84	19.80
6	19.80	23.76
7	23.76	27.72
8	27.72	31.68
9	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28

RoHS Compliant



TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.156"(3.96mm) Wire to Board Housing

DIMENSION TOLERANCE

.x ±0.15mm
.xx ±0.10mm
.xxx ±0.05mm

P/N	H310S**00C-*N	CHECKED	David	UNIT	mm	DATE	2010/11/26
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A