

☆☆☆ 261 Series ☆☆☆

P/N: W261V**G*1


Material: PBT with Glass Filled,
UL 94V-0, Black

Conductor: Brass, Gold-Flash



Available: 1~40 Pins

Mate with H261

*	Dim. C	Dim. D
0	3.00	6.00
1	3.00	3.00
2	3.00	4.26
3	3.00	8.00
4	3.00	10.00
5	3.00	14.76
6	3.00	23.46
7	3.00	9.00

Special Pin Length or Other
Options Consult to Tec Spec
or Customer Design

RECOMMENDED P.C.BOARD HOLE DIMM.

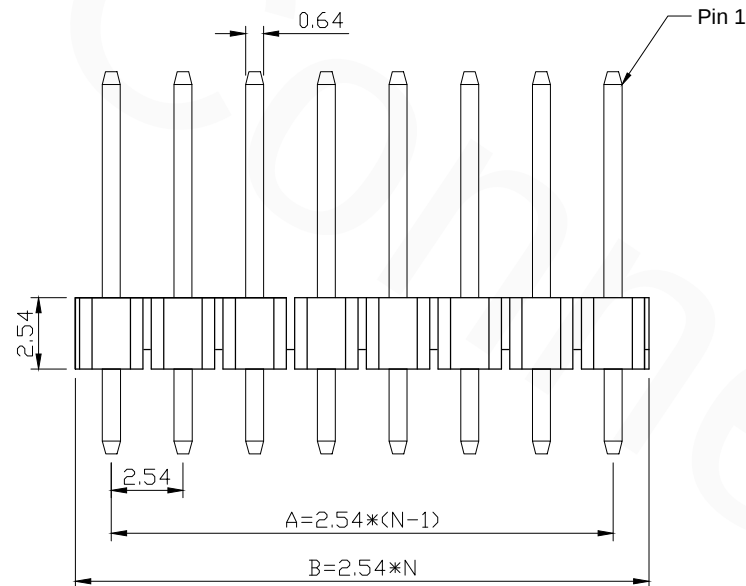

RoHS Compliant



C&J Connector

TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: http://www.cnj.tw/

TITLE

.100"(2.54mm) Wire to Board Single Row Vertical Pin Header

DIMENSION TOLERANCE

.x ±0.30 xÃ ±0.25
.xx ±0.20
.xxx ±0.10

P/N	W261V**G*1	CHECKED	David	UNIT	mm	DATE	2010/11/12
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 261 Series ☆☆☆

P/N: W261H**G*1

Material: PBT with 30%Glass-Filled, UL 94V-0, Black

Conductor: Brass, Gold-Flash

Available: 1~40P

Mate with W238

*	Dim. A	Dim. B	Dim. C
0	3.00	6.00	1.50
1	3.00	3.00	1.50
2	3.00	4.26	1.50
3	3.00	8.00	1.50
4	3.00	10.00	1.50
5	3.00	9.00	1.50
6	4.00	9.00	1.50
7	4.00	12.00	1.20

Special pin length or other options
consult to tec spec or customer design

RoHS Compliant

**C&J Connector**

TEL: 886-2-86871898

FAX: 886-2-86872959

Mail: tceldh@gmail.com

Web: http://www.cnj.tw/

TITLE

.100"(2.54mm) Single Row Horizontal Pin Header

DIMENSION TOLERANCE





.x ±0.30 x° ±2°

.xx ±0.20

.xxx ±0.10

P/N	W261H**G*1	CHECKED	David	UNIT	mm	DATE	2010/10/18
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

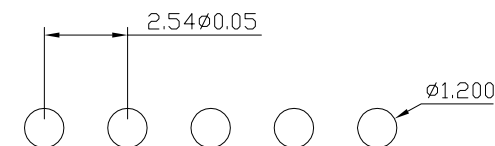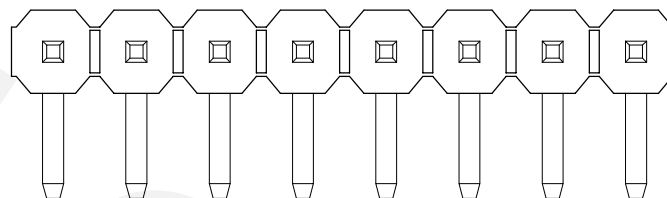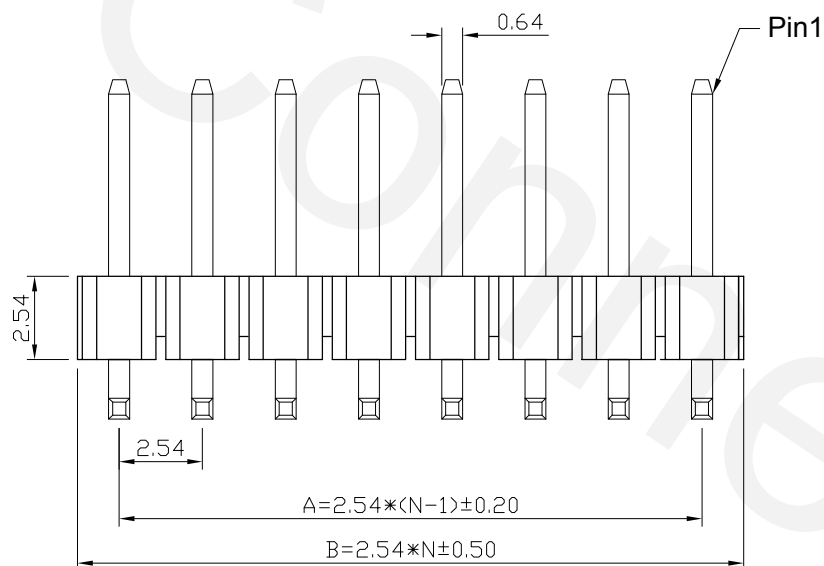RECOMMENDED P.C.BOARD HOLE DIMM.

☆☆☆ 261 Series ☆☆☆



P/N: W261V**G*2

Material: PBT with Glass Filled,
UL 94V-0, Black

Conductor: Brass, Gold-Flash

Available: 2~80 Pins



Mate with H261

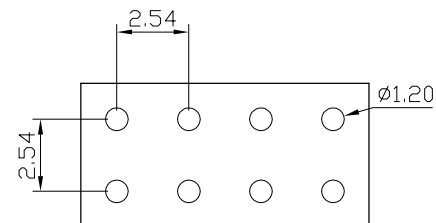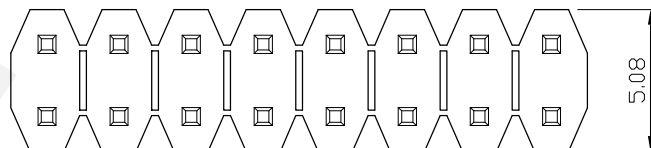

RECOMMENDED P.C.BOARD HOLE DIMM.

*	Dim. C	Dim. D
0	3.00	6.00
1	3.00	3.00
2	3.00	4.26
3	3.00	8.00
4	3.00	10.00
5	3.00	4.46
6	3.00	9.00

Special Pin Length or Other
Options Consult to Tec Spec
or Customer Design

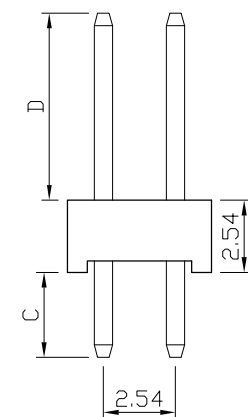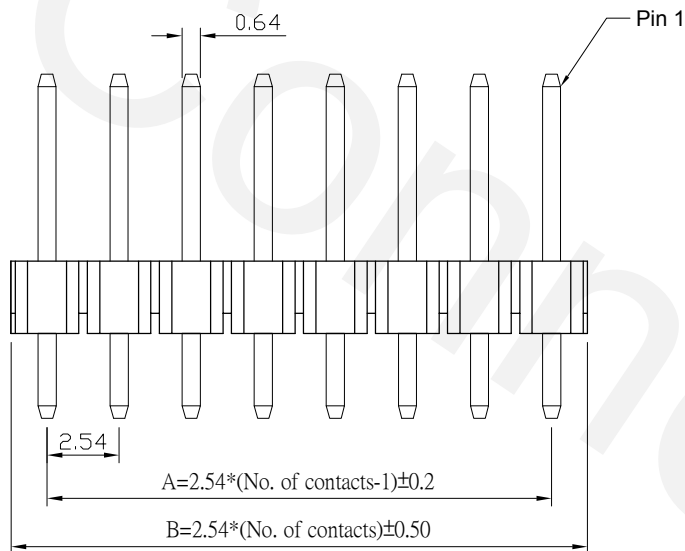

RoHS Compliant



C&J Connector

TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: <http://www.cnj.tw/>

TITLE

.100"(2.54mm) Wire to Board Dual Row Vertical Pin Header

DIMENSION TOLERANCE

.x ±0.30 x° ±2°
.xx ±0.20
.xxx ±0.10

P/N	W261V**G*2	CHECKED	David	UNIT	mm	DATE	2010/11/12
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 261 Series ☆☆☆

P/N: W261H**G*2


Material: PBT with Glass-Filled, UL 94V-0, Black

Conductor: Brass, Tin-Plated


Available: 2~80P

Mate with H261


*	Dim. C	Dim. D
0	3.00	6.00
1	3.00	3.00
2	3.00	4.26
3	3.00	8.00
4	3.00	10.00
5	3.00	14.76
6	3.00	23.46
7	4.63	4.63
8	3.00	9.00
Special Pin Length or Other Options Consult to Tec Spec or Customer Design		

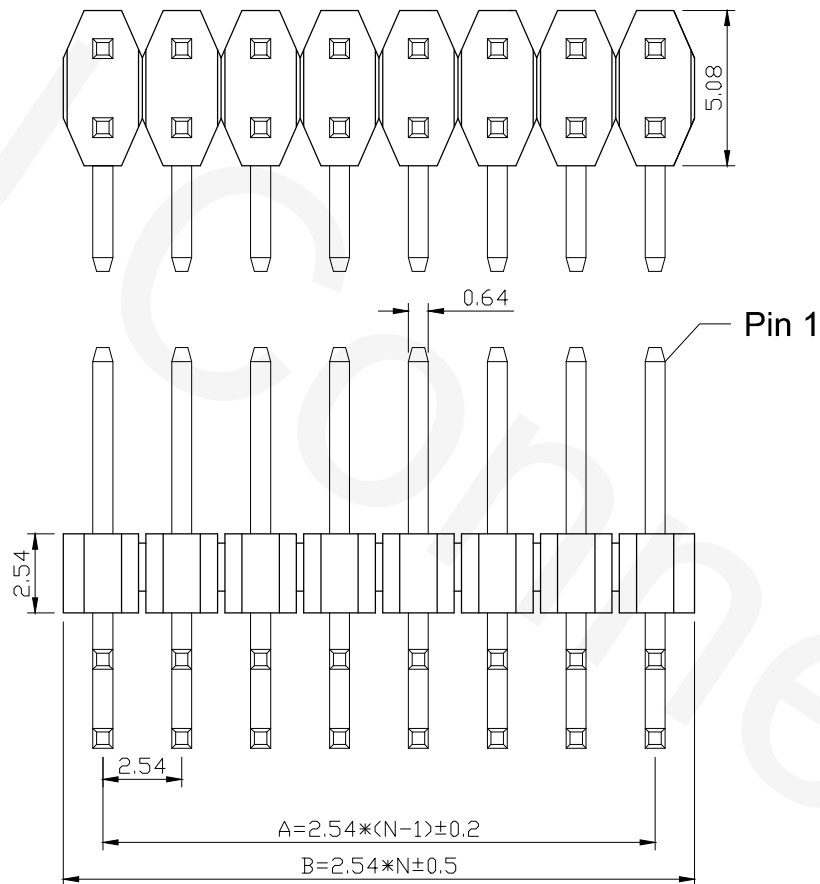

Pin 1

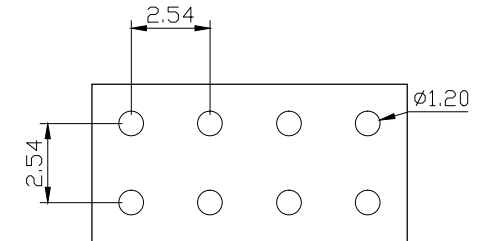

RECOMMENDED P.C. BOARD HOLE DIMM.

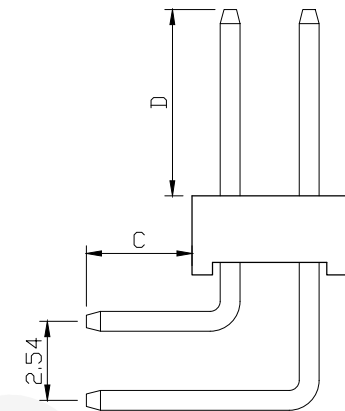

RoHS Compliant



C&J Connector

TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: <http://www.cnj.tw/>

TITLE

.100"(2.54mm) Dual Row Horizontal Pin Header

DIMENSION TOLERANCE

.x ± 0.30 x° $\pm 2^\circ$
.xx ± 0.20
.xxx ± 0.10

P/N	W261H**G*2	CHECKED	David	UNIT	mm	DATE	2010/10/04
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 261 Series ☆☆☆


P/N: W261V**GL1

Material: PBT with Glass Filled,
UL 94V-0, Black


Conductor: Brass, Gold-Flash

Available: 1~40 Pins



Mate with H261



REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			



RECOMMENDED P.C.BOARD HOLE DIMM.

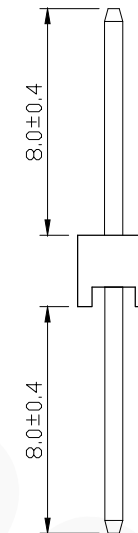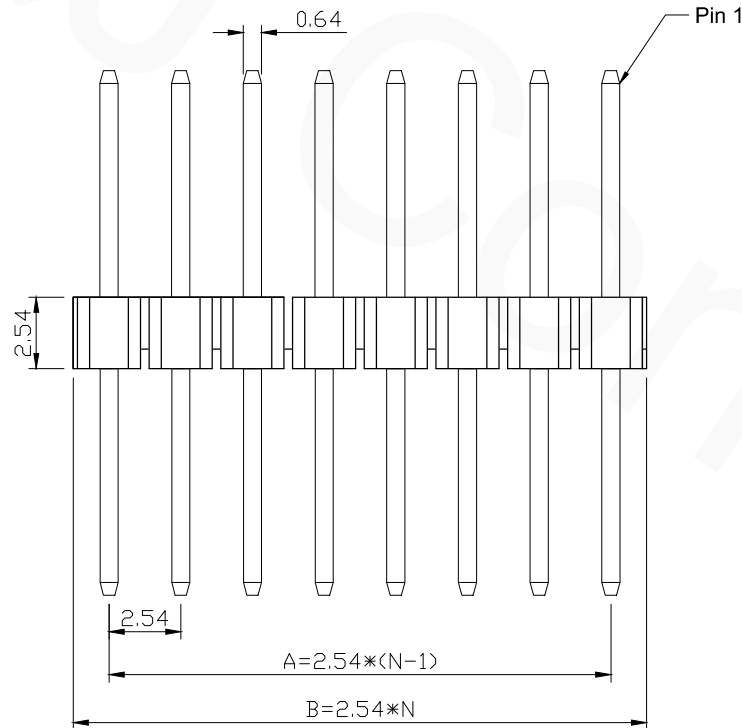

RoHS Compliant



C&J Connector

TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: <http://www.cnj.tw/>

TITLE

.100"(2.54mm) Wire to Board Single Row Vertical Pin Header

DIMENSION TOLERANCE

.x ±0.30 x° ±2°
.xx ±0.20
.xxx ±0.10

P/N	W261V**GL1	CHECKED	David	UNIT	mm	DATE	2010/11/12
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 261 Series ☆☆☆


P/N: W261V**GF1

Material: PBT with 30% Glass Filled,
UL 94V-0, Black




Conductor: Brass, Gold-Flash

Available: 2~80 Pins

Mate with H261



REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

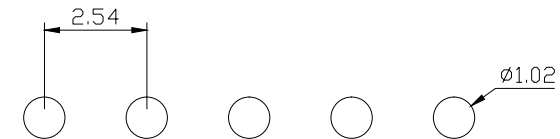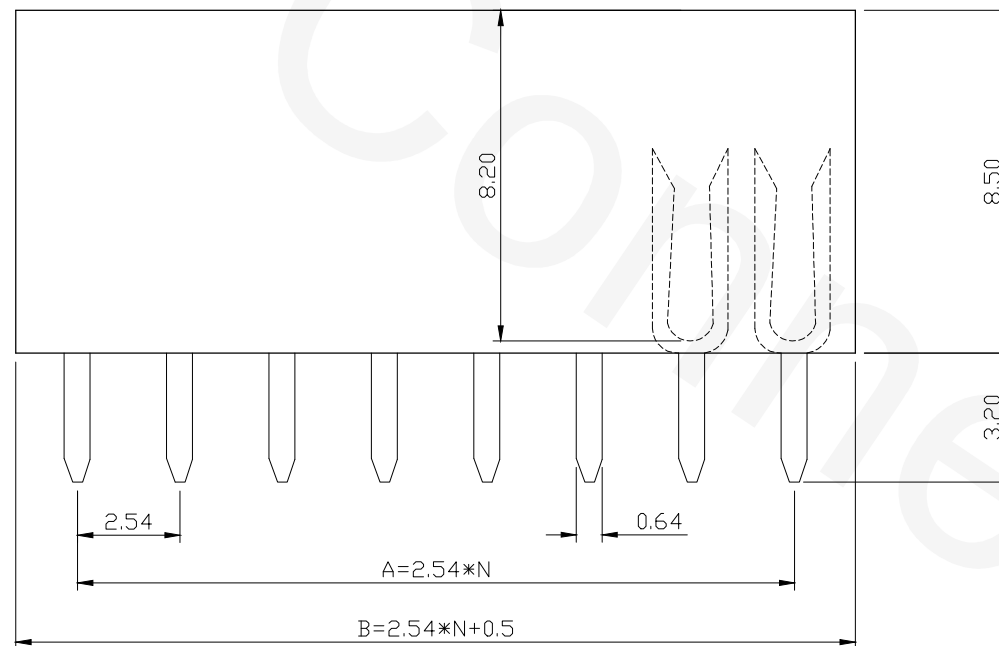RECOMMENDED P.C. BOARD HOLE DIMM.

RoHS Compliant

**C&J Connector**TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: <http://www.cnj.tw/>

TITLE

.100"(2.54mm) Wire to Board Vertical Wafer

DIMENSION TOLERANCE

.x ±0.30 x° ±2°

.xx ±0.20

.xxx ±0.10

P/N	W261V**GF1	CHECKED	David	UNIT	mm	DATE	2010/11/12
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 261 Series ☆☆☆



P/N: W261H**GF1

Material: PBT with Glass-Filled, UL 94V-0, Black



Conductor: Brass, Gold-Flash

Available: 2~25P

Mate with H261

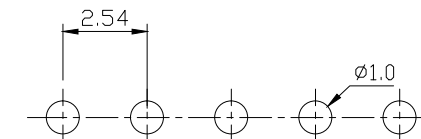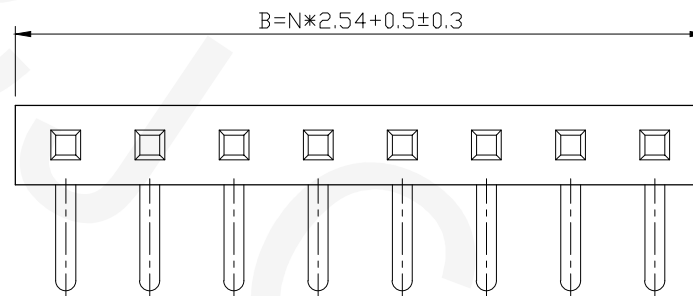

RECOMMENDED P.C.BOARD HOLE DIMM.

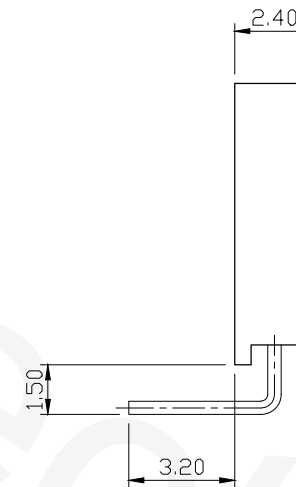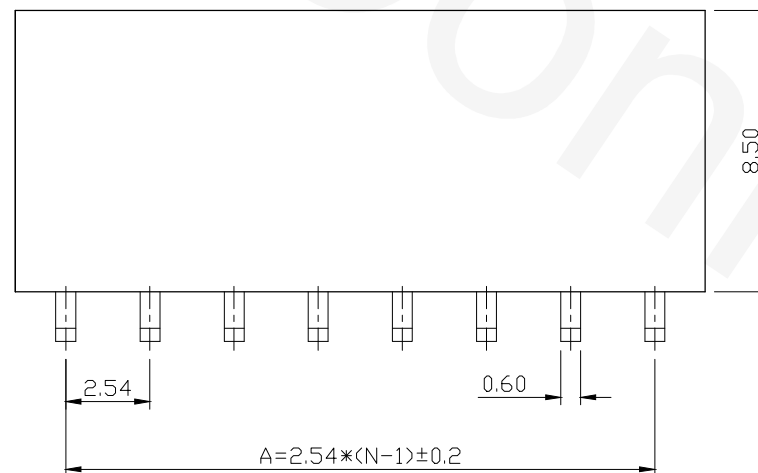

RoHS Compliant



C&J Connector

TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: <http://www.cnj.tw/>

TITLE

.100"(2.54mm) Wire to Board Horizontal Wafer

DIMENSION TOLERANCE

.x ±0.30 x° ±2°
.xx ±0.20
.xxx ±0.10

P/N	W261H**GF1	CHECKED	David	UNIT	mm	DATE	2010/10/18
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

REVISIONS			
REV	DESCRIPTION	DATE	DRAWN
A			

☆☆☆ 261 Series ☆☆☆




P/N: W261H**GF2

Material: PBT with Glass-Filled, UL 94V-0, Black


Conductor: SQ0.6*0.4, Brass, Gold-Flash

Available: 6~64P

Mate with H262

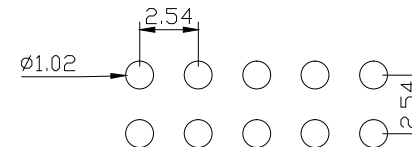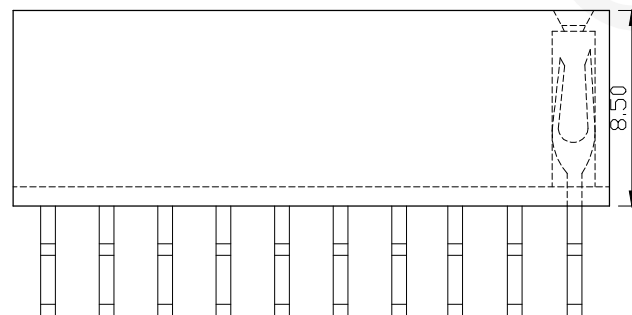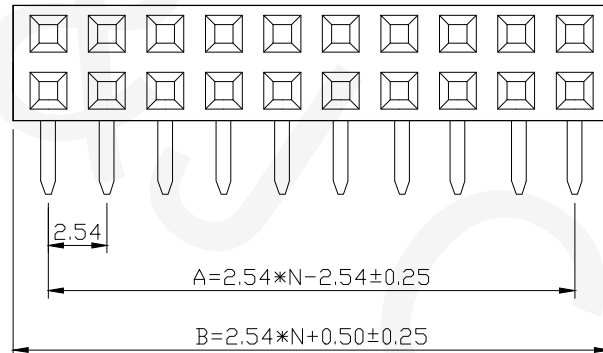

RECOMMENDED P.C.BOARD HOLE DIMM.

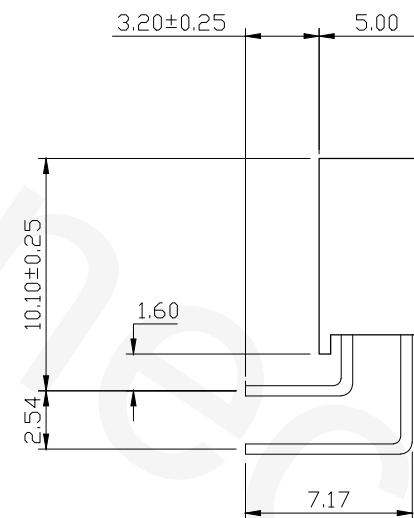

RoHS Compliant



C&J Connector

TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: <http://www.cnj.tw/>

TITLE

.100"(2.54mm) Wire to Board Dual Row Horizontal Wafer

DIMENSION TOLERANCE

.x ±0.30 x° ±2°
.xx ±0.20
.xxx ±0.10




P/N	W261H**GF2	CHECKED	David	UNIT	mm	DATE	2010/10/18
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 261 Series ☆☆☆

P/N: H261S**000-01

Material: PPO or PBT, UL 94V-0

Available: 1~30P

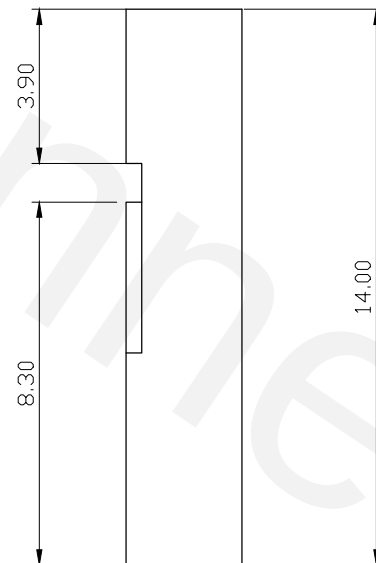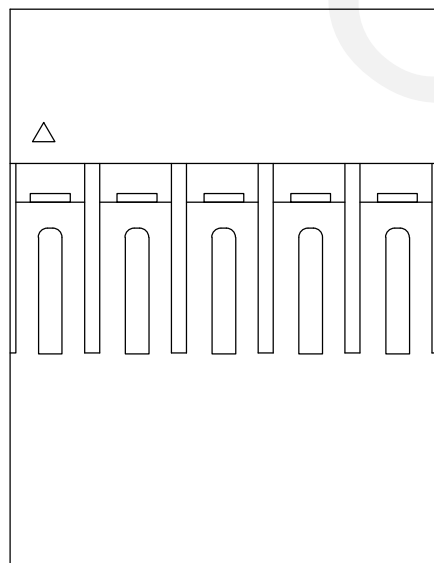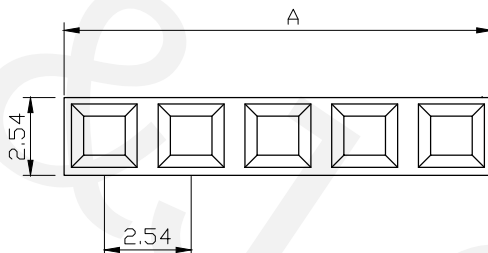

Circuitis	Dim. A	16	40.64
1	2.54	17	43.18
2	5.08	18	45.72
3	7.62	19	48.26
4	10.16	20	50.80
5	12.70	21	53.34
6	15.24	22	55.88
7	17.78	23	58.42
8	20.32	24	60.96
9	22.86	25	63.50
10	25.40	26	66.04
11	27.94	27	68.58
12	30.48	28	71.12
13	33.02	29	73.66
14	35.56	30	76.20
15	38.10		

RoHS Compliant

**C&J Connector**TEL: 886-2-86871898 FAX: 886-2-86872959
Mail: tceldh@gmail.com Web: <http://www.cnj.tw/>

TITLE

.100"(2.54mm) Dupont Single Row Housing

DIMENSION TOLERANCE

.x ±0.30 x° ±2°

.xx ±0.20

.xxx ±0.10

P/N	H261S**000-01	CHECKED	David	UNIT	mm	DATE	2010/11/26
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A

☆☆☆ 261 Series ☆☆☆

P/N: T261B00T00-01

Material: Brass, Tin-Plated

Mate with H261


Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC


Contact Resistance: 20mΩ Max

Insulation Resistance: 1000mΩ Min


Withstanding Voltage: 1000V AC/minute




Section A-A




Section C-C



Section B-B



Section D-D

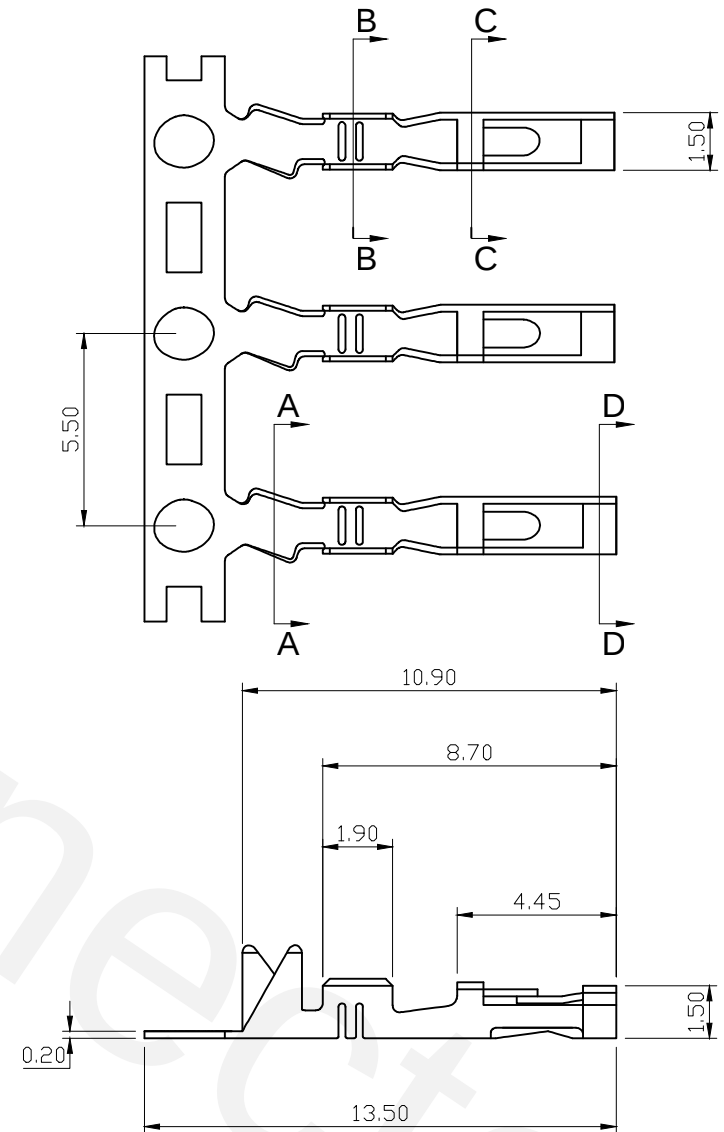

RoHS Compliant



C&J Connector

TEL: 886-2-86871898

FAX: 886-2-86872959

Mail: tceldh@gmail.com

Web: <http://www.cnj.tw/>

TITLE

.100"(2.54mm) Dupont Single/Dual Housing Terminal

DIMENSION TOLERANCE

.x ±0.30 x° ±2°

.xx ±0.20

.xxx ±0.10

P/N	T261B00T00-01	CHECKED	David	UNIT	mm	DATE	2010/11/26
DRAWN	Michael	APPROVED	Lily	SCALE	1:1	REV	A